



India



Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards

ANNUAL SAVINGS IN 2030



Reduce electricity use

→ by over **150.2 TWh**

→ **7.3%** of future national electricity use



Save electricity worth **10 billion USD**

equivalent to **69 Power Plants [500MW]**



Reduce CO₂ emissions by **170 million tonnes**

equivalent to **90 million Passenger Cars**



PERCENTAGE OF EACH PRODUCT'S SAVINGS TO THE COUNTRY'S TOTAL SAVINGS IN 2030



31%

Lighting



13%

Residential
Refrigerators



38%

Room Air
Conditioners



2%


Distribution
Transformer



16%

Industrial
Electric Motor

EVEN GREATER SAVINGS POSSIBLE WITH BAT MEPS

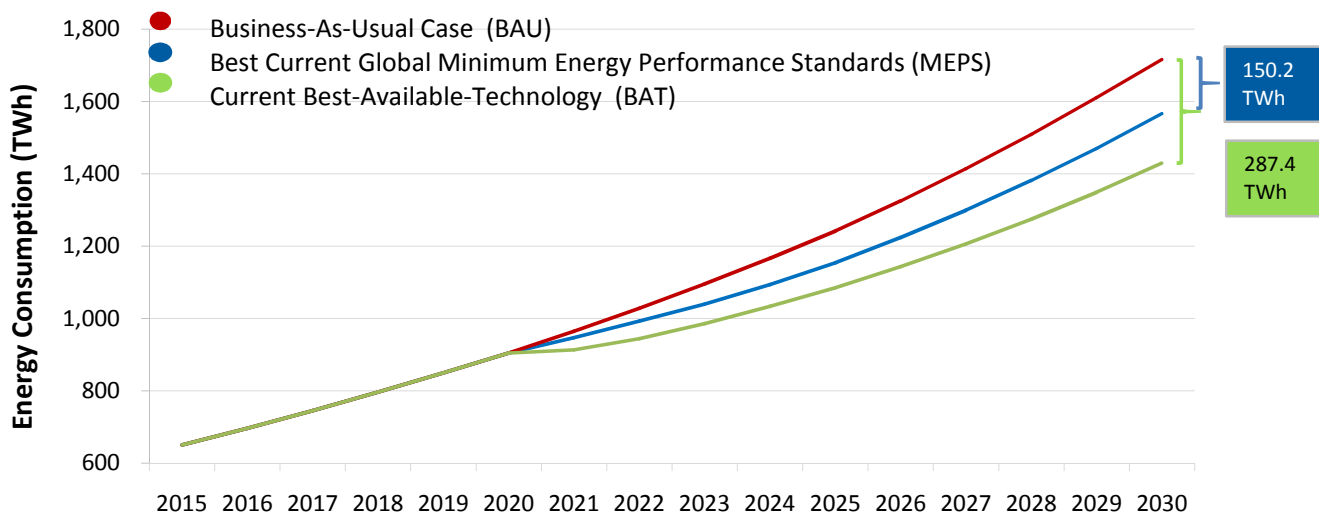









THE PATHWAY TO ENERGY EFFICIENCY







ANNUAL SAVINGS IN 2025 and 2030

											
		Lighting		Residential Refrigerators		Room Air Conditioners		Distribution Transformers		Industrial Electric Motors	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
	Electricity (TWh)	43.0	46.4	8.8	19.5	24.2	57.4	1.6	3.1	9.9	23.8
	Electricity Bills (billion US\$)	2.5	2.7	0.5	1.2	1.4	3.4	0.1	0.2	1.1	2.6
	CO2 Emissions (million tonnes)	48.5	52.3	10.0	22.0	27.3	64.7	1.8	2.8	11.2	26.8

CUMULATIVE SAVINGS (2020 - 2030)

						
		Lighting	Residential Refrigerators	Room Air Conditioners	Distribution Transformers	Industrial Electric Motors
	Electricity (TWh)	379.65	101.56	287.26	17.73	117.55
	Electricity Bills (billion US\$)	22.40	5.99	16.95	1.05	12.93
	CO2 Emissions (million tonnes)	428.07	114.52	323.90	16.03	132.55

OTHER BENEFITS IN 2030

	Direct GHG emissions reduced by →	50.8 million tonnes
	Increased grid connection to →	75.1 million households
	Reduced electricity subsidies by →	1 billion USD
	Reduced emissions by →	SO ₂ 665.2 thousand tonnes NO _x 360.2 thousand tonnes

Country Specific Data and Input Assumptions For India



GENERAL INFORMATION

Population	1267.4 million
GDP per capita	1,631 US\$
Electrification level	75%
CO2 Emission Factor	0.904 kg / kWh

ELECTRICITY MARKET

Residential Electricity tariff	0.059 US\$ / kWh
Industrial Electricity tariff	0.110 US\$ / kWh
Transmission and distribution loss factor	19.83%

ASSUMPTIONS

Product	Unit Energy Consumption (kWh/year) or Efficiency Level			Type of Product
	BAU	MEPS	BAT	
Lighting	65.7	15.3	8.8	Low incandescent Lamp, 3h/day; 14W CFL; 8W LED
Residential Refrigerators	352	207	159	2-door top-mount Average size 280 liters
Room Air Conditioners	2,607	1,990	1,304	Split unit with 3.5 kW cooling capacity
Distribution Transformers	N/A	SEAD Tier3	SEAD Tier5	three-phase and single-phase liquid-filled and three-phase dry-type
Industrial Electric Motors	IE1/IE0	IE3	IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW; 75 - 375 kW

METHODOLOGY

The analysis uses CLASP's and LBNL's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor was comes from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for Doestic Refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.

in support of

