


## **Central African Republic**



Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

ANNUAL SAVIN	GS IN 2030						
0	Reduce electricity use						
	→ by over 30 GWh						
	→ 6.2% of future national electricity use						
ààà	Save electricity worth 3 Million USD						
	equivalent to 1 Power Plants [20MW]						
CO <sub>2</sub>	Reduce CO <sub>2</sub> emissions by <b>20 Thousand Tonn</b>	es					
	equivalent to 10 Thousand Passenger Cars						



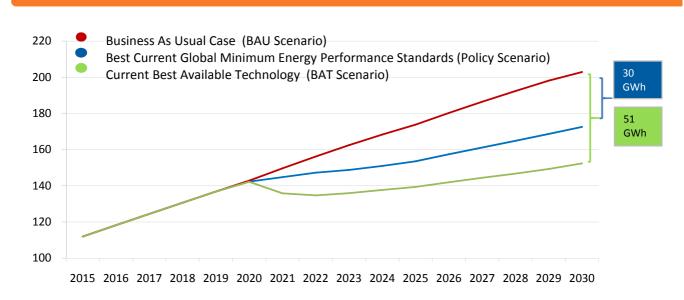

Energy Consumption (GWh)

## THE PATHWAY TO ENERGY EFFICIENCY



**15 Thousand Households** 



ANNUAL SAVINGS IN 2025 AND 2030												
		<b>4</b>						<u> </u>				
		Lighting		Residential Refrigerators		Room Air Conditioners		Transformers		Industrial Electric Motors		
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030	
•	Electricity (GWh)	12.5	14.9	3.3	6.6	0.3	0.5	3.1	6.5	1.0	1.9	
ààà	Electricity Bills (thousand US\$)	1,392.9	1,648.4	371.4	735.4	31.8	53.9	346.4	718.8	108.7	215.8	
CO <sub>2</sub>	CO2 Emissions (tonnes)	8,511.4	10,073.0	2,269.5	4,494.0	194.3	329.3	1,922.2	3,988.9	664.0	1,318.9	
CUMULATIV	CUMULATIVE SAVINGS (2020 - 2030)											
		Ligh	Residential Lighting Refrigerators		Room Air Conditioners		Transformers		Industrial Electric Motors			
	Electricity (GWh)	11	114.9		36.7		3.0 35		5.9	10.7		
ààà	Electricity Bills (million US\$)	12.8		4.1		0.3		4.0		1.2		
CO <sub>2</sub>	CO2 Emissions (thousand tonnes)	77	77.9		24.9		2.0		22.1		7.3	
OTHER BENEFITS IN 2030												
*	Direct GHG emissions reduced by → 2 Thousand Tonnes											

### ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Increased grid connection to

Country Nationally Determined Contribution (NDC): Reduce emissions by 5% compared to baseline projections by 2030, and by 25% compared to baseline projections by 2050.

# **Country Specific Data and Input Assumptions**





## For Central African Republic

GENERAL INFORMATION				
Population	4.9 million			
GDP per capita	567 US\$			
Electrification level	3%			
CO2 Emission Factor	0.616 kg / kWh			

ELECTRICITY MARKET	
Residential Electricity tariff	0.111 US\$ / kWh
Industrial Electricity tariff	0.111 US\$ / kWh
Transmission and	9.18%
distribution loss factor	

### **ASSUMPTIONS**

Product		Unit Energy Co	onsumption (kWh/yea	Type of Droduct	
		BAU Policy Scenario BAT			Type of Product
<b>4</b>	Lighting	65.7	15.3	8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED
	Residential Refrigerators	350	191	134	2-door top-mount Average size 225 liters
	Room Air Conditioners	1.626	1,326	869	Split unit with 3.5 kW cooling capacity
<u>#</u>	Transformers	N/A	SEAD Tier3	SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power and distribution transformer
	Industrial Electric Motors	IE1/IE0	IE3	IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW

#### **METHODOLOGY**

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

#### ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.















