


China




Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

ANNUAL SAVINGS IN 2030 Reduce electricity use by over 108 TWh 1.2% of future national electricity use 10 Billion USD Save electricity worth equivalent to 49 Power Plants [500MW] Reduce CO₂ emissions by **90 Million Tonnes** equivalent to **50 Million Passenger Cars**

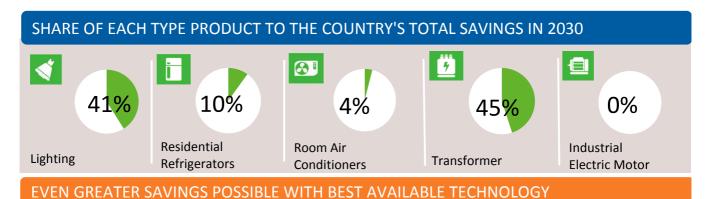

11,600 Business As Usual Case (BAU Scenario) Best Current Global Minimum Energy Performance Standards (Policy Scenario) 10,600 Current Best Available Technology (BAT Scenario)

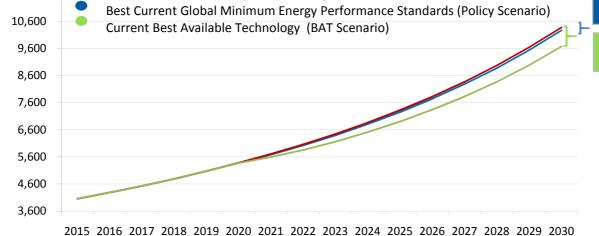

Energy Consumption (TWh)

108

TWh

TWh

THE PATHWAY TO ENERGY EFFICIENCY





ANNUAL SAVINGS IN 2025 AND 2030											
		Lighting		Residential Room Refrigerators Condit		m Air Transformers		Industrial Electric Motors			
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
	Electricity (TWh)	29.2	43.8	6.8	10.3	6.5	5.6	24.8	48.1	0.0	0.0
ååå	Electricity Bills (million US\$)	2,626.2	3,938.5	607.7	925.5	584.2	502.3	2,234.0	4,325.9	0.0	0.0
CO2	CO2 Emissions (million tonnes)	24.1	36.2	5.6	8.5	5.4	4.6	19.1	37.1	0.0	0.0

CUMULATIVE SAVINGS (2020 - 2030)								
	∢				7			
		Lighting	Residential Refrigerators	Room Air Conditioners	Transformers	Industrial Electric Motors		
•	Electricity (TWh)	302.1	67.1	59.9	278.0	0.0		
ååå	Electricity Bills (billion US\$)	27.2	6.0	5.4	25.0	0.0		
CO2	CO2 Emissions (million tonnes)	249.8	55.5	49.6	214.4	0.0		

	OTHER BEN	OTHER BENEFITS IN 2030							
	*	Direct GHG emissions reduced by	→	409 Million Tonnes					
•	ååå	Reduced electricity subsidies by	→	164 Million USD					
·	<u> </u>	Reduced emissions by → SO2	538 Tho Tonnes	NOx Tonnes					

ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): To achieve the peaking of CO2 emissions around 2030 and making best efforts to peak early; Reduction in CO2 emissions intensity (emissions per unit of GDP) by 60% to 65% by 2030, compared to 2005 levels; Increase in the share of non-fossil fuel in primary energy to around 20% by 2030; Increase in forest stock volume by 4.5 billion m3 by 2030, relative to 2005 levels.

Country Specific Data and Input Assumptions

For China



GENERAL INFORMATION					
Population	1370.8 million				
GDP per capita	12,599 US\$				
Electrification level	100%				
CO2 Emission Factor	0.771 kg / kWh				

ELECTRICITY MARKET					
Residential Electricity tariff	0.090 US\$ / kWh				
Industrial Electricity tariff	0.110 US\$ / kWh				
Transmission and	6.74%				
distribution loss factor					

ASS		IDT	-	
\sim	1111/	1101		v v
AJJ	UΙV	иг и	ı	v.

Product		Unit Energy Co	onsumption (kWh/yea	Type of Product	
		BAU	BAU Policy Scenario BAT		Type of Froduct
4	Lighting	65.7	15.3	8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED
	Residential Refrigerators	235	200	139	2-door top-mount Average size 250 liters
	Room Air Conditioners	777	709	390	Split unit with 3.5 kW cooling capacity
<u>#</u>	Transformers	N/A	SEAD Tier3	SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power and distribution transformer
	Industrial Electric Motors	IE3	IE3	IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW

METHODOLOGY

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.















