


# Congo, Rep.




Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

### ANNUAL SAVINGS IN 2030

↓ <b>•</b> 	Reduce electricity use						
	→ by over 209 GWh						
	→ 16.8% of future national electricity use						
ààà	Save electricity worth <b>10 Million USD</b>						
	equivalent to <b>2 Power Plants [20MW]</b>						
C02	Reduce CO <sub>2</sub> emissions by 60 Thousand Tonnes						
	equivalent to 30 Thousand Passenger Cars	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~					

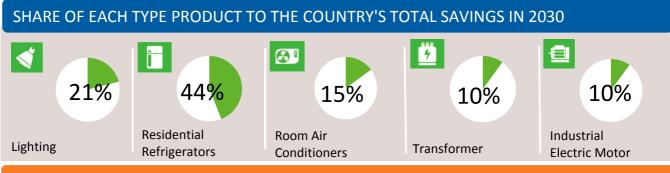

EVEN GREATER SAVINGS POSSIBLE WITH BEST AVAILABLE TECHNOLOGY

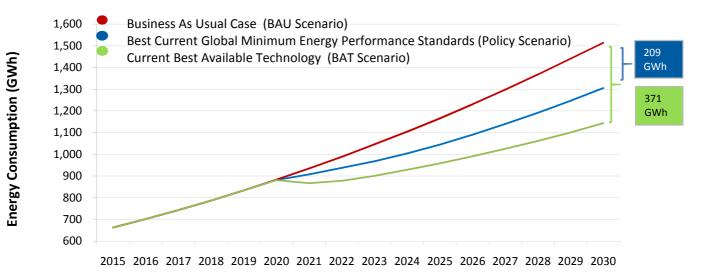

# THE PATHWAY TO ENERGY EFFICIENCY



ANNUAL SAVINGS IN 2025 AND 2030

		Lighting		Residential Refrigerators		Room Air Conditioners		<b>Transformers</b>		Industrial Electric Motors	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
	Electricity (GWh)	44.0	44.1	42.1	91.9	14.1	31.0	10.6	20.1	10.0	21.7
ففف	Electricity Bills (thousand US\$)	2,067.1	2,074.7	1,980.0	4,320.7	663.8	1,457.7	498.3	942.7	1,303.6	2,821.9
CO2	CO2 Emissions (thousand tonnes)	12.0	12.0	11.5	25.0	3.8	8.4	2.6	5.0	2.7	5.9

#### CUMULATIVE SAVINGS (2020 - 2030) **S** • 4 Residential **Room Air** Industrial Lighting Transformers Refrigerators Conditioners **Electric Motors** Electricity (GWh) 383.4 480.2 161.8 117.9 113.9 **Electricity Bills** ààà 7.6 18.0 22.6 5.5 14.8 (million US\$) **CO2** Emissions 44.0 29.1 31.0 104.3 130.6 CO2 (thousand tonnes)

OTHER BENEFITS IN 2030						
✵	Direct GHG emissions reduced by	<b>→</b>	71 Thousand Tonnes			
$\sim$	Increased grid connection to	→	104 Thousand Households			

### ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): At least a 48% reduction in emissions by 2025 and 55% by 2035, compared to a business-as-usual scenario, conditional upon international support.

# **Country Specific Data and Input** Assumptions



## For Congo, Rep.

GENERAL INFORMATION				ELECTRICITY MARKET				
Population 4.6 million		Residentia		ntial Electricity tariff	0.047 US\$ / kWh			
GDP per capita	5,988 US\$		dustr	ial Electricity tariff	0.130 US\$ / kWh			
Electrification level	35%		Transmission and		9.18%			
CO2 Emission Factor	0.247 kg / kWh		stribu	ition loss factor				
ASSUMPTIONS								
Droduct	Unit Energy Consumption (kWh/year) or Efficiency Level			The of Decident				
Product	BAU	Policy Scenario		BAT	Type of Product			
Lighting	65.7	15.3		8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED			
Residential Refrigerators	350	191		134	2-door top-mount Average size 225 liters			
Room Air Conditioners	1 626	1,326		869	Split unit with 3.5 kW cooling capacity			
<b>Transformers</b>	N/A	SEAD Tier3		SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power and distribution transformer			
Industrial Electric Motors	IE1/IE0	IE3		IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW			

### METHODOLOGY

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

#### ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- E Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life anisotropy in the DAM expression of the base based on the based of the based o

clasp

- life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.





green<sup>☆</sup> cooling initiative

SUSTAINABLE

ENERGY FOR ALL