


Madagascar




Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

ANNUAL SAVINGS IN 2030

	Reduce electricity use						
	→ by over 359 GWh						
	→ 6.5% of future national electricity use						
ààà	Save electricity worth 80 Million USD						
	equivalent to 4 Power Plants [20MW]						
	Reduce CO ₂ emissions by 220 Thousand Ton	nes					
C02	equivalent to 120 Thousand Passenger Cars	ക്കു കു കു കു കു കു കു					

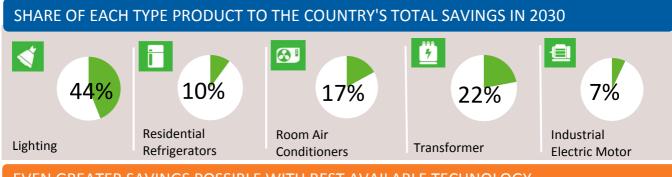

EVEN GREATER SAVINGS POSSIBLE WITH BEST AVAILABLE TECHNOLOGY

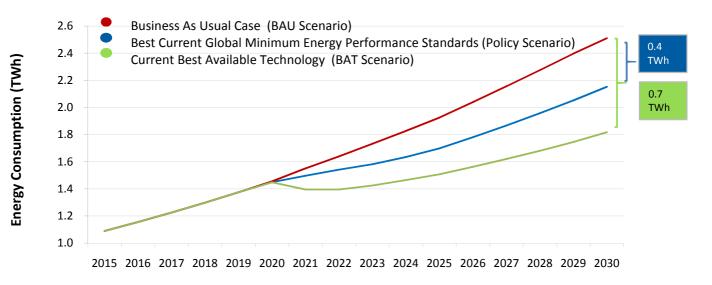

THE PATHWAY TO ENERGY EFFICIENCY



ANNUAL SAVINGS IN 2025 AND 2030

		Lighting		Residential Refrigerators		Room Air Conditioners		Transformers		Industrial Electric Motors	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
	Electricity (GWh)	134.6	158.2	15.3	36.5	28.3	60.7	37.3	77.4	11.6	25.7
ففف	Electricity Bills (million US\$)	31.1	36.5	3.5	8.4	6.5	14.0	8.6	17.9	0.6	1.3
CO2	CO2 Emissions (thousand tonnes)	83.5	98.2	9.5	22.6	17.6	37.6	21.0	43.6	7.2	16.0

CUMULATIVE SAVINGS (2020 - 2030)								
		1	Ī		<u> </u>			
		Lighting	Residential Refrigerators	Room Air Conditioners	Transformers	Industrial Electric Motors		
	Electricity (TWh)	1.2	0.2	0.3	0.4	0.1		
ààà	Electricity Bills (million US\$)	283.9	42.0	74.7	99.0	6.7		
C02	CO2 Emissions (thousand tonnes)	762.6	112.9	200.8	241.6	82.7		

OTHER BENEFITS IN 2030						
*	Direct GHG emissions reduced by	→	130 Thousand Tonnes			
	Increased grid connection to	→	179 Thousand Households			

ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): In 2030, Madagascar aims to reduce approximately 30 MtCO2 of its emissions of GHG, representing 14% of national emissions, compared to the BAU scenario, with projections based of GHG inventory from year 2000 to 2010.

Country Specific Data and Input Assumptions





GENERAL INFORMATION				ELECTRICITY MARKET					
Population	23.6 million		Residential Electricity tariff		0.231 US\$ / kWh				
GDP per capita	449 US\$		Industrial Electricity tariff		0.050 US\$ / kWh				
Electrification level	15%		Transmission and		9.18%				
CO2 Emission Factor	0.564 kg / kWh		distribu	ition loss factor					
ASSUMPTIONS									
Product	Unit Energy Co	onsumption	(kWh/yea	ar) or Efficiency Level	Turne of Dreduct				
Product	BAU	Policy Scenario		BAT	Type of Product				
Lighting	65.7	15.3		8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED				
Residential Refrigerators	325	191		134	2-door top-mount Average size 225 liters				
Room Air Conditioners	1.626	1,326		869	Split unit with 3.5 kW cooling capacity				
Transformers	N/A	SEAD Tier3		SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power and distribution transformers				
Industrial Electric Motors	IE1/IE0	IE3		IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW				

METHODOLOGY

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- E Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life anisotropy in the DAM expression of the base based on the based of the based o
- life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.









