


Maldives





Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

ANNUAL SAVINGS IN 2030 Reduce electricity use by over 55 GWh **13.0%** of future national electricity use 20 Million USD Save electricity worth equivalent to 1 Power Plants [20MW] Reduce CO₂ emissions by **50 Thousand Tonnes** equivalent to 30 Thousand Passenger Cars

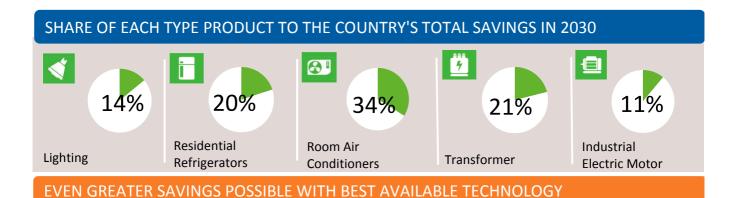

380 Business As Usual Case (BAU Scenario) Best Current Global Minimum Energy Performance Standards (Policy Scenario) 360 Current Best Available Technology (BAT Scenario) Energy Consumption (GWh) 340 **GWh** 320 300 **GWh** 280 260

2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030

U4E COUNTRY ASSESSMENT, DECEMBER 2016

240 220 200

THE PATHWAY TO ENERGY EFFICIENCY





ANNUAL SAVINGS IN 2025 AND 2030											
		Lighting		Residential Refrigerators		Room Air Conditioners		Transformers		Industrial Electric Motors	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
	Electricity (GWh)	7.5	7.8	5.7	10.9	10.3	18.6	6.0	11.3	2.4	6.0
ååå	Electricity Bills (million US\$)	2.1	2.2	1.6	3.1	2.9	5.2	1.7	3.1	0.8	1.9
CO ₂	CO2 Emissions (thousand tonnes)	6.8	7.0	5.2	9.9	9.3	16.8	4.3	8.2	2.2	5.4

CUMULATIVE SAVINGS (2020 - 2030)								
		Lighting	Residential	Room Air	Transformers	Industrial		
		0 0	Refrigerators	Conditioners		Electric Motors		
0	Electricity (GWh)	65.8	61.9	109.1	66.5	29.2		
ååå	Electricity Bills (million US\$)	18.4	17.3	30.6	18.0	9.1		
CO ₂	CO2 Emissions (thousand tonnes)	59.5	56.0	98.7	48.2	26.4		

OTHER BENEFITS IN 2030



Direct GHG emissions reduced by



22 Thousand Tonnes

ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): An unconditional 10% reduction in energy sector emissions by 2030, compared to business as usual, or a 24% reduction conditional on international support. Business as usual 2030 emissions are projected to be triple those in 2010.

Country Specific Data and Input Assumptions For Maldives





GENERAL INFORMATION	
Population	0.4 million
GDP per capita	11,954 US\$
Electrification level	100%
CO2 Emission Factor	0.725 kg / kWh

ELECTRICITY MARKET	
Residential Electricity tariff	0.280 US\$ / kWh
Industrial Electricity tariff	0.310 US\$ / kWh
Transmission and distribution loss factor	19.83%

ASSUMPTIONS

Product		Unit Energy Co	onsumption (kWh/yea	Type of Product	
		BAU Policy Scenario BAT		Type of Froduct	
4	Lighting	65.7	15.3	8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED
	Residential Refrigerators	450	212	139	2-door top-mount Average size 300 liters
	Room Air Conditioners	1.837	1,326	869	Split unit with 3.5 kW cooling capacity
<u>#</u>	Transformers	N/A	SEAD Tier3	SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power and distribution transformer
	Industrial Electric Motors	IE1/IE0	IE3	IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW

METHODOLOGY

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.















