






Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.


### ANNUAL SAVINGS IN 2030

Oman

|                 | Reduce electricity use                                      |              |
|-----------------|---|--------------|
|                 | → by over <b>2 TWh</b>                                      |              |
|                 | → 4.7% of future national electricity use                   |              |
| ààà             | Save electricity worth 90 Million USD                       |              |
|                 | equivalent to <b>4 Power Plants [100MW]</b>                 |              |
| CO <sub>2</sub> | Reduce CO <sub>2</sub> emissions by <b>1 Million Tonnes</b> |              |
|                 | equivalent to 800 Thousand Passenger Cars                   | എ എ എ എ<br>എ |

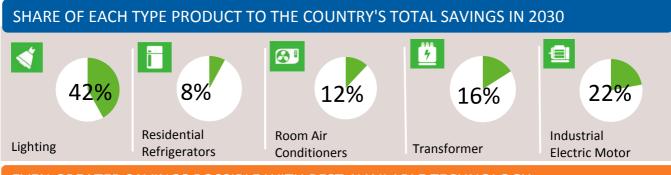

EVEN GREATER SAVINGS POSSIBLE WITH BEST AVAILABLE TECHNOLOGY

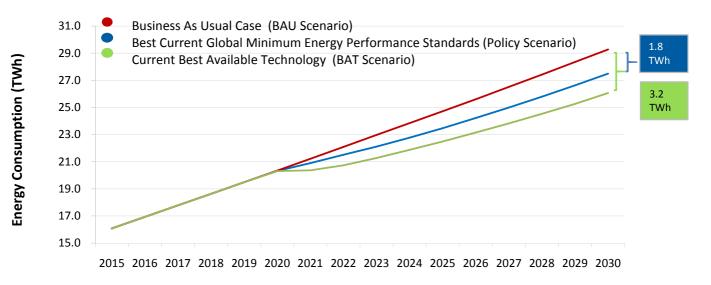

# THE PATHWAY TO ENERGY EFFICIENCY



ANNUAL SAVINGS IN 2025 AND 2030

|     |                                     | <b>Lighting</b> |       | Residential<br>Refrigerators |       | Room Air<br>Conditioners |       | <b>7</b> Transformers |       | Industrial<br>Electric Motors |       |
|-----|-------------------------------------|-----------------|-------|------------------------------|-------|--------------------------|-------|-----------------------|-------|-------------------------------|-------|
|     |                                     | 2025            | 2030  | 2025                         | 2030  | 2025                     | 2030  | 2025                  | 2030  | 2025                          | 2030  |
|     | Electricity (GWh)                   | 725.3           | 745.5 | 69.1                         | 137.4 | 116.7                    | 200.0 | 150.0                 | 290.4 | 185.9                         | 398.3 |
| ففف | Electricity Bills<br>(million US\$) | 37.7            | 38.8  | 3.6                          | 7.1   | 6.1                      | 10.4  | 7.8                   | 15.1  | 8.7                           | 18.7  |
| CO2 | CO2 Emissions<br>(thousand tonnes)  | 593.0           | 609.6 | 56.5                         | 112.4 | 95.4                     | 163.5 | 114.5                 | 221.6 | 152.0                         | 325.7 |

| CUMULATIVE SAVINGS (2020 - 2030) |                                     |          |                              |                          |              |                               |  |  |
|----------------------------------|-------------------------------------|----------|------------------------------|--------------------------|--------------|-------------------------------|--|--|
|                                  |                                     | 1        | Ī                            |                          | 5            |                               |  |  |
|                                  |                                     | Lighting | Residential<br>Refrigerators | Room Air<br>Conditioners | Transformers | Industrial<br>Electric Motors |  |  |
|                                  | Electricity (TWh)                   | 6.4      | 0.8                          | 1.2                      | 1.7          | 2.1                           |  |  |
| ààà                              | Electricity Bills<br>(million US\$) | 331.0    | 39.5                         | 63.2                     | 87.4         | 98.9                          |  |  |
| CO <sub>2</sub>                  | CO2 Emissions<br>(million tonnes)   | 5.2      | 0.6                          | 1.0                      | 1.3          | 1.7                           |  |  |

## **OTHER BENEFITS IN 2030**

\*

Direct GHG emissions reduced by

→ 262 Thousand Tonnes

### ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): An unconditional 2% emissions cut in 2030, relative to business as usual levels. This will be achieve through an unquantified "increase" in renewables and "reduction" in gas flaring.

# **Country Specific Data and Input** Assumptions



## For Oman

| GENERAL INFORMATION        |  |            |                                | ELECTRICITY MARKET |  |  |  |  |  |
|----------------------------|--|------------|--------------------------------|--------------------|--|--|--|--|--|
| Population                 | 3.9 million  |            | Residential Electricity tariff |                    | 0.052 US\$ / kWh   |  |  |  |  |
| GDP per capita             | 20,832 US\$  |            | Industrial Electricity tariff  |                    | 0.047 US\$ / kWh   |  |  |  |  |
| Electrification level      | 98%  |            | Transmission and               |                    | 6.68%  |  |  |  |  |
| CO2 Emission Factor        | 0.763 kg / kWh   |            | distribu                       | ition loss factor  |  |  |  |  |  |
| ASSUMPTIONS                |  |            |                                |                    |  |  |  |  |  |
| Droduct                    | Unit Energy Consumption (kWh/year) or Efficiency Level |            |                                |                    | T and David at   |  |  |  |  |
| Product                    | BAU  | Policy Sc  | enario                         | ВАТ                | Type of Product  |  |  |  |  |
| Lighting                   | 65.7   | 15.3       |                                | 8.8                | Low incandescent Lamp,3h/day; 14W<br>CFL; 8W LED   |  |  |  |  |
| Residential Refrigerators  | 500  | 231        |                                | 167                | 2-door top-mount<br>Average size 350 liters  |  |  |  |  |
| Room Air<br>Conditioners   | 2 981  | 2,432      |                                | 1,593              | Split unit with 3.5 kW cooling capacity  |  |  |  |  |
| Transformers               | N/A  | SEAD Tier3 |                                | SEAD Tier5         | three-phase and single-phase liquid-<br>filled and three-phase dry-type power<br>and distribution transformers |  |  |  |  |
| Industrial Electric Motors | IE1/IE0  | IE3        |                                | IE4                | 3-phase induction motors<br>Ranging from:<br>0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW                            |  |  |  |  |

#### METHODOLOGY

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

#### ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- E Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life anisotropy in the DAM expression of the base based on the based of the based o

clasp

- life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.





green<sup>☆</sup> cooling initiative

SUSTAINABLE

ENERGY FOR ALL