


Korea, Dem. Rep.




Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

	•					
ANNUAL SAVINGS IN 2030						
• •	Reduce electricity use → by over 2 TWh → 7.3% of future national electricity use					
ààà	Save electricity worth 70 Million USD equivalent to 5 Power Plants [100MW]					
CO ₂	Reduce CO ₂ emissions by 1 Million Tonnes equivalent to 650 Thousand Passenger Cars	~~~				

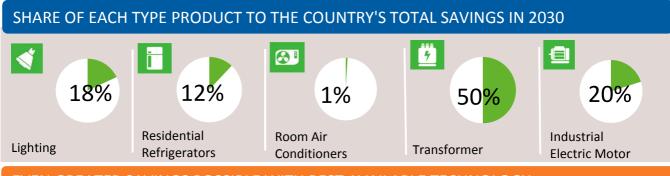

EVEN GREATER SAVINGS POSSIBLE WITH BEST AVAILABLE TECHNOLOGY

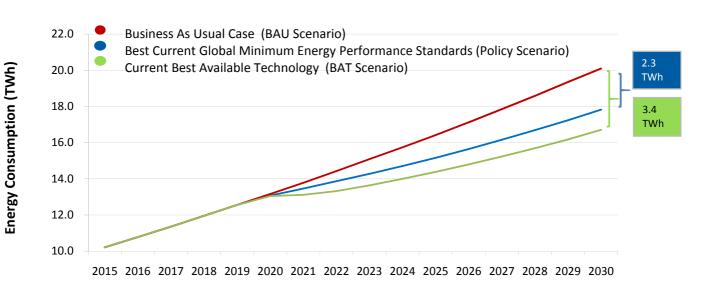

THE PATHWAY **TO ENERGY EFFICIENCY**





ANNUAL SAVINGS IN 2025 AND 2030											
		Lighting		Residential Refrigerators		Room Air Conditioners		Transformers		Industrial Electric Motors	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
•	Electricity (GWh)	329.2	407.8	144.0	281.7	3.5	6.8	580.8	1,136.9	203.1	449.3
ààà	Electricity Bills (thousand US\$)	10,534.1	13,050.6	4,606.9	9,014.5	111.9	218.0	18,584.4	36,380.8	6,499.4	14,376.3
CO ₂	CO2 Emissions (thousand tonnes)	187.7	232.5	82.1	135.2	2.0	3.3	278.8	545.7	115.8	256.1
CUMULATIV	CUMULATIVE SAVINGS (2020 - 2030)										
		Lighting		Residential Refrigerators		Room Air Conditioners		Transf	ormers		strial Motors
4		3.1			erators	Contait	ioners			Electric	MIDLOIS
	Electricity (TWh)	3	.1	_	erators .6	0		6	.5	2.	
ěěě	Electricity (TWh) Electricity Bills (million US\$)		.1	_	.6	0			.5 9.1		.3
	Electricity Bills	98		1	.6	0	.2		9.1	2.	.5
ŠŠŠ CO ₂	Electricity Bills (million US\$) CO2 Emissions	98	3.4	50	.6	1.	.2	20	9.1	2. 74	.5
ŠŠŠ CO ₂	Electricity Bills (million US\$) CO2 Emissions (million tonnes)	98	.8	50	.6	0.	0 2 0	20	9.1	2. 74 1.	.5

ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Specific Data and Input Assumptions

For Korea, Dem. Rep.



GENERAL INFORMATION	
Population	25.2 million
GDP per capita	0 US\$
Electrification level	26%
CO2 Emission Factor	0.48 kg / kWh

ELECTRICITY MARKET	
Residential Electricity tariff	0.032 US\$ / kWh
Industrial Electricity tariff	0.032 US\$ / kWh
Transmission and	15.80%
distribution loss factor	

ASSUMPTIONS

Product		Unit Energy Co	onsumption (kWh/yea	Type of Droduct	
		BAU Policy Scenario BAT			Type of Product
4	Lighting	65.7	15.3	8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED
	Residential Refrigerators	625	212	139	2-door top-mount Average size 300 liters
	Room Air Conditioners	813	663	434	Split unit with 3.5 kW cooling capacity
<u>#</u>	Transformers	N/A	SEAD Tier3	SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power and distribution transformer
	Industrial Electric Motors	IE1/IE0	IE3	IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW

METHODOLOGY

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.















