







Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

### ANNUAL SAVINGS IN 2030

	Reduce electricity use						
	→ by over <b>15 GWh</b>						
	→ 10.1% of future national electricity use						
ààà	Save electricity worth 4 Million USD						
	equivalent to <b>1 Power Plants [20MW]</b>						
C0 <sub>2</sub>	Reduce CO <sub>2</sub> emissions by <b>10 Thousand Ton</b>	nes					
	equivalent to 6 Thousand Passenger Cars						

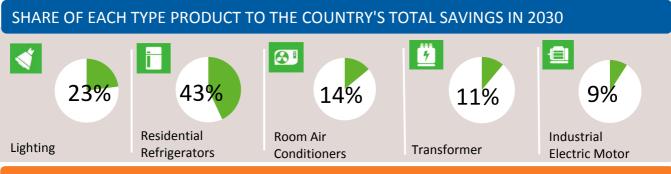

EVEN GREATER SAVINGS POSSIBLE WITH BEST AVAILABLE TECHNOLOGY

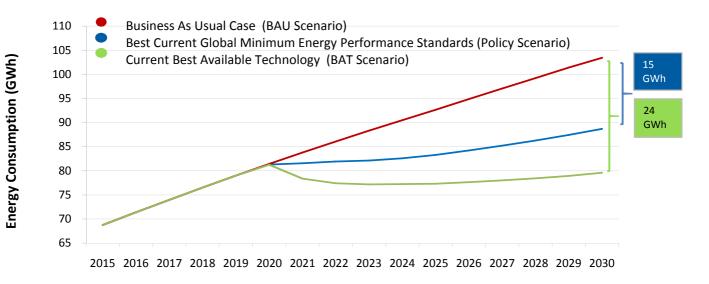

# THE PATHWAY TO ENERGY EFFICIENCY



ANNUAL SAVINGS IN 2025 AND 2030

		Lighting		Residential Refrigerators		Room Air Conditioners		<b>7</b> Transformers		Industrial Electric Motors	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
	Electricity (GWh)	3.5	3.4	3.2	6.3	1.1	2.0	0.9	1.6	0.6	1.3
ففف	Electricity Bills (thousand US\$)	1,041.3	1,027.3	966.7	1,901.2	343.6	591.2	259.8	492.2	194.5	404.9
CO2	CO2 Emissions (tonnes)	2,689.0	2,652.9	2,496.3	4,909.4	887.3	1,526.6	566.7	1,073.3	502.3	1,045.5

CUMULATIVE SAVINGS (2020 - 2030)								
		1	Ī		<u>5</u>			
		Lighting	Residential Refrigerators	Room Air Conditioners	Transformers	Industrial Electric Motors		
	Electricity (GWh)	30.1	35.2	11.9	9.6	7.3		
ففف	Electricity Bills (million US\$)	9.0	10.6	3.6	2.9	2.2		
CO <sub>2</sub>	CO2 Emissions (thousand tonnes)	23.3	27.3	9.2	6.3	5.6		

 $\rightarrow$ 

### **OTHER BENEFITS IN 2030**

\*

Direct GHG emissions reduced by

7 Thousand Tonnes

### ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): Dominica commits to progressively reduce total gross greenhouse gas (GHG) emissions below 2014 levels (164.5 Ggs est.) at the following reduction rates:17.9% by 2020; 39.2% by 2025; and 44.7% by 2030.

# **Country Specific Data and Input** Assumptions

## For Dominica



GENERAL INFORMATION				ELECTRICITY MARKET					
Population	0.1 million		Resider	ntial Electricity tariff	0.30 US\$ / kWh				
GDP per capita	7,434 US\$		Industr	ial Electricity tariff	0.30 US\$ / kWh				
Electrification level	98%		Transm	ission and	15.55%				
CO2 Emission Factor	0.654 kg / kWh		distribu	ition loss factor					
ASSUMPTIONS									
Durchust	Unit Energy Co	onsumption	Turne of Dreduct						
Product	BAU	Policy Sc	enario	BAT	Type of Product				
Lighting	65.7	15.3		8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED				
Residential Refrigerators	485	212		163	2-door top-mount Average size 300 liters				
Room Air Conditioners	3 252	2,653		1,738	Split unit with 3.5 kW cooling capacity				
Transformers	N/A	SEAD Tier3		SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power and distribution transformers				
Industrial Electric Motors	IE1/IE0	IE3	8	IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW				

#### METHODOLOGY

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

#### ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- ine emissions in the BAU compared to the best alternative with natural rerigerants (mostly R290 for splits and R600a for domestic rerr
- Additional to the above sources, a questionnaire was used to gather data from country officials.









