





Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

ANNUAL SAVINGS IN 2030

	Reduce electricity use					
	→ by over 126 GWh					
	→ 15.2% of future national electricity use					
ààà	Save electricity worth 30 Million USD					
	equivalent to 1 Power Plants [20MW]					
C0 ₂	Reduce CO ₂ emissions by 120 Thousand Ton	ines				
	equivalent to 60 Thousand Passenger Cars	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~				

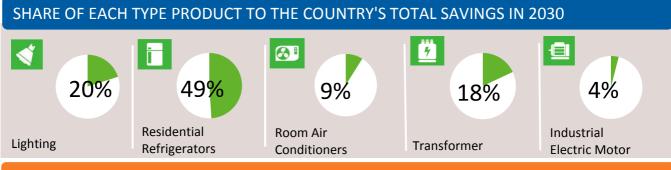

EVEN GREATER SAVINGS POSSIBLE WITH BEST AVAILABLE TECHNOLOGY

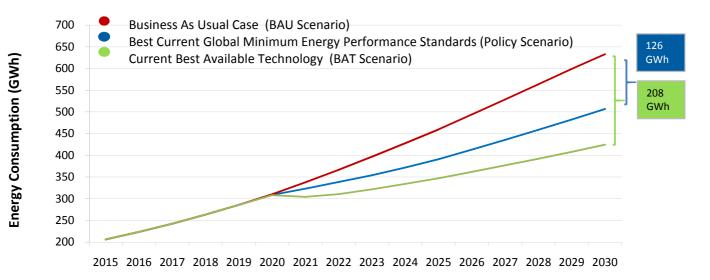

THE PATHWAY TO ENERGY EFFICIENCY



ANNUAL SAVINGS IN 2025 AND 2030

		Lighting		Residential Refrigerators		Room Air Conditioners		Transformers		Industrial Electric Motors	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
	Electricity (GWh)	21.3	25.1	28.3	61.4	5.6	11.1	11.1	23.0	2.4	5.5
ففف	Electricity Bills (million US\$)	4.6	5.4	6.1	13.3	1.2	2.4	2.4	5.0	0.5	1.2
CO ₂	CO2 Emissions (thousand tonnes)	19.8	23.3	26.3	57.1	5.2	10.3	9.3	19.4	2.2	5.1

CUMULATIVE SAVINGS (2020 - 2030)							
		1	Ī		<u>7</u>		
		Lighting	Residential Refrigerators	Room Air Conditioners	Transformers	Industrial Electric Motors	
	Electricity (GWh)	194.3	321.3	61.3	127.2	28.0	
ففف	Electricity Bills (million US\$)	42.2	69.7	13.3	27.6	6.1	
CO ₂	CO2 Emissions (thousand tonnes)	180.6	298.6	57.0	107.3	26.0	

OTHER BENEFITS IN 2030							
*	Direct GHG emissions reduced by	→	27 Thousand Tonnes				
	Increased grid connection to	→	63 Thousand Households				

ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): The government of the State of Eritrea is committed to reduce the CO2 emissions from fossil fuels by 23.1% in 2020, 30.2 % by 2025 and 39.2% by 2030 visa-vis 2010 levels. If additional support is solicited, it can be further reduced by 36.4 % in 2020, 61.1% by 2015 and 80.6% by 2030.

Country Specific Data and Input Assumptions

For Eritrea

GENERAL INFORMATION		ELEC	ELECTRICITY MARKET					
Population 5.2 million		Reside	ntial Electricity tariff	0.217 US\$ / kWh				
GDP per capita	1,411 US\$	Indust	rial Electricity tariff	0.217 US\$ / kWh				
Electrification level	32%	Transn	nission and	9.18%				
CO2 Emission Factor	0.844 kg / kWh	distrib	ution loss factor					
ASSUMPTIONS								
Product	Unit Energy Consumption (kWh/year) or Efficiency Level			Type of Product				
FIOUUCI	BAU	Policy Scenario	ВАТ	Type of Floddet				
Lighting	65.7	15.3	8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED				
Residential Refrigerators	350	191	134	2-door top-mount Average size 225 liters				
Room Air Conditioners	1.626	1,326	869	Split unit with 3.5 kW cooling capacity				
Transformers	N/A	SEAD Tier3	SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power and distribution transformer				
Industrial Electric Motors	IE1/IE0	IE3	IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW				

METHODOLOGY

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- ine emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerants)
- Additional to the above sources, a questionnaire was used to gather data from country officials.









