

Indonesia






Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

Reduce electricity use → by over 36 TWh → 10.6% of future national electricity use Save electricity worth 4 Billion USD equivalent to 16 Power Plants [500MW] Reduce CO₂ emissions by 30 Million Tonnes equivalent to 20 Million Passenger Cars



EVEN GREATER SAVINGS POSSIBLE WITH BEST AVAILABLE TECHNOLOGY

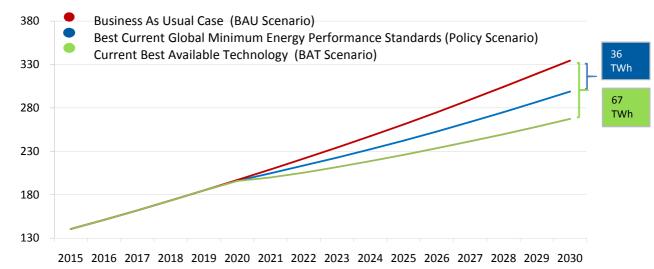

Energy Consumption (TWh)

THE PATHWAY TO ENERGY EFFICIENCY





ANNUAL SAVINGS IN 2025 AND 2030											
		Lighting		Residential Refrigerators		Room Air Conditioners		Transformers		Industrial Electric Motors	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
	Electricity (TWh)	1.9	2.2	5.7	11.8	2.3	4.0	6.0	11.7	2.6	5.9
ååå	Electricity Bills (million US\$)	237.5	267.7	712.8	1,466.5	290.9	496.2	741.6	1,452.0	211.2	473.2
CO2	CO2 Emissions (million tonnes)	1.8	2.0	5.3	10.9	2.2	3.7	4.4	8.7	2.4	5.5

CUMULATIVE SAVINGS (2020 - 2030)								
		4			7			
		Lighting	Residential Refrigerators	Room Air Conditioners	Transformers	Industrial Electric Motors		
0	Electricity (TWh)	17.3	64.1	24.4	67.3	30.4		
فَفَفَ	Electricity Bills (billion US\$)	2.1	8.0	3.0	8.3	2.4		
CO2	CO2 Emissions (million tonnes)	15.9	59.3	22.5	49.9	28.1		

OTHER BENEFITS IN 2030								
*	Direct GHG emissions reduced by	\rightarrow	38 Million Tonnes					
	Increased grid connection to	→	18 Million Households					
ààà	Reduced electricity subsidies by	→	2 Billion USD					
	Reduced emissions by → SO2	121 Tho	ousand NOx Tonnes					

ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Government Regulation of the Republic of Indonesia No. 70/2009 on Energy Conservation sets the legal basis for introduction of energy efficiency standards and labeling for electronic appliances. The Ministry of Energy has set an EE target to achieve 1% reduction of energy intensity annually and reduction of GHGs emission of 14.71 million tCO2 annually by 2019.

Country Nationally Determined Contribution (NDC): Unconditional Reduction:26% of BAU 2020; 29% of BAU of 2030 (2.881 Gt BAU in 2030), Conditional: 41% BAU of 2030.

Country Specific Data and Input Assumptions

For Indonesia



GENERAL INFORMATION	
Population	252.8 million
GDP per capita	3,515 US\$
Electrification level	76%
CO2 Emission Factor	0.741 kg / kWh

ELECTRICITY MARKET					
Residential Electricity tariff	0.124 US\$ / kWh				
Industrial Electricity tariff	0.080 US\$ / kWh				
Transmission and	19.83%				
distribution loss factor					

ASS	UIV	1P I	IOI	V S
	7			

Product		Unit Energy Co	onsumption (kWh/yea	Type of Product	
		BAU	BAU Policy Scenario BAT		Type of Froduct
4	Lighting	65.7	15.3	8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED
	Residential Refrigerators	352	207	159	2-door top-mount Average size 280 liters
	Room Air Conditioners	2.304	2,003	1,309	Split unit with 2.64 kW cooling capacity
<u> </u>	Transformers	N/A	SEAD Tier3	SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power and distribution transformers
	Industrial Electric Motors	IE1/IE0	IE3	IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW

METHODOLOGY

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.















