



# Lesotho



Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

# Reduce electricity use → by over 130 GWh → 6.3% of future national electricity use Save electricity worth 10 Million USD equivalent to 1 Power Plants [20MW] Reduce CO₂ emissions by 90 Thousand Tonnes equivalent to 50 Thousand Passenger Cars

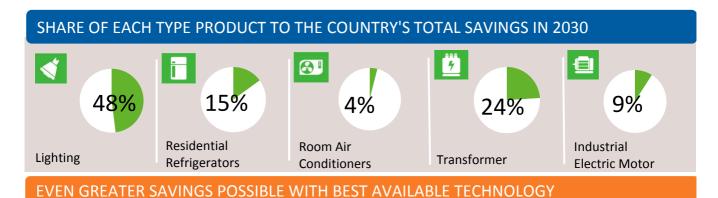

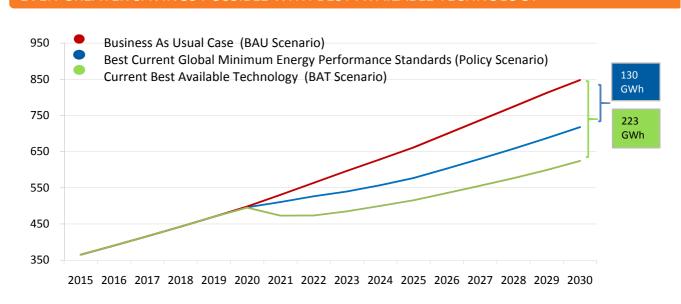

Energy Consumption (GWh)

# THE PATHWAY TO ENERGY EFFICIENCY





ANNUAL SAVINGS IN 2025 AND 2030											
		Ligh	nting		ential erators	Roor Condit		_	ormers	Indu:	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
	Electricity (GWh)	52.8	62.1	9.3	19.8	2.6	5.6	15.0	31.1	4.9	11.5
فْفْف	Electricity Bills (thousand US\$)	4,907.6	5,775.1	868.2	1,845.9	240.0	521.0	1,392.7	2,894.3	98.5	230.0
CO <sub>2</sub>	CO2 Emissions (thousand tonnes)	37.3	43.9	6.6	14.0	1.8	4.0	9.6	20.0	3.5	8.1

CUMULATIVE SAVINGS (2020 - 2030)							
		Lighting	Residential	Room Air	Transformers	Industrial	
41		6	Refrigerators	Conditioners		Electric Motors	
0	Electricity (GWh)	482.1	105.2	29.4	172.2	57.8	
ååå	Electricity Bills (million US\$)	44.8	9.8	2.7	16.0	1.2	
CO2	CO2 Emissions (thousand tonnes)	340.8	74.4	20.8	110.6	40.9	
OTHER BENEFITS IN 2030							
*	Direct GHG emissions reduced by → 19 Thousand Tonnes						

	OTTILITULE	STILL BEINE ITS IN 2000						
	*	Direct GHG emissions reduced by	<b>→</b>	19 Thousand Tonnes				
•		Increased grid connection to	<b>→</b>	65 Thousand Households				

## ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): An unconditional 10% reduction in emissions compared to a business-as-usual scenario by 2030, or a conditional reduction of 35% by 2030, dependent on international support.

# **Country Specific Data and Input Assumptions**

# For Lesotho





GENERAL INFORMATION	
Population	2.1 million
GDP per capita	995 US\$
Electrification level	28%
CO2 Emission Factor	0.642 kg / kWh

ELECTRICITY MARKET					
Residential Electricity tariff	0.093 US\$ / kWh				
Industrial Electricity tariff	0.020 US\$ / kWh				
Transmission and	9.18%				
distribution loss factor					

### **ASSUMPTIONS**

Product		Unit Energy Co	onsumption (kWh/yea	Type of Product	
		BAU	BAU Policy Scenario BAT		Type of Froudet
<b>4</b>	Lighting	65.7	15.3	8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED
	Residential Refrigerators	325	191	134	2-door top-mount Average size 225 liters
	Room Air Conditioners	1 ()84	884	579	Split unit with 3.5 kW cooling capacity
<u>#</u>	Transformers	N/A	SEAD Tier3	SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power and distribution transformers
	Industrial Electric Motors	IE1/IE0	IE3	IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW

### **METHODOLOGY**

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

### ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.















