


Macedonia, FYR




Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

Reduce electricity use → by over 492 GWh → 4.6% of future national electricity use Save electricity worth 50 Million USD equivalent to 6 Power Plants [20MW] Reduce CO₂ emissions by 440 Thousand Tonnes equivalent to 240 Thousand Passenger Cars

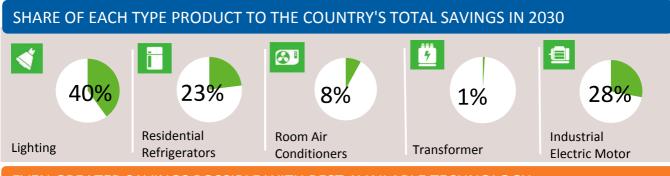

EVEN GREATER SAVINGS POSSIBLE WITH BEST AVAILABLE TECHNOLOGY

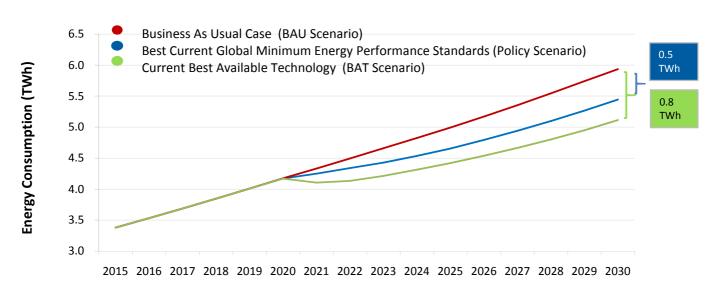

THE PATHWAY TO ENERGY EFFICIENCY





ANNUAL SAVINGS IN 2025 AND 2030											
		Lighting		Residential Refrigerators		Room Air Conditioners		Transformers		Industrial Electric Motors	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
	Electricity (GWh)	197.0	198.8	56.1	111.0	18.5	40.9	1.8	1.7	63.1	139.6
ååå	Electricity Bills (million US\$)	17.7	17.9	5.0	10.0	1.7	3.7	0.2	0.1	6.3	14.0
CO2	CO2 Emissions (thousand tonnes)	176.4	178.0	50.2	99.4	16.6	36.6	1.4	1.3	56.5	125.0

CUMULATIVE SAVINGS (2020 - 2030)								
	Lighting		Residential	Room Air	Transformers	Industrial		
48			Refrigerators	Conditioners		Electric Motors		
0	Electricity (TWh)	1.7	0.6	0.2	0.0	0.7		
ååå	Electricity Bills (million US\$)	155.4	55.3	19.1	1.8	72.4		
CO2	CO2 Emissions (million tonnes)	1.5	0.6	0.2	0.0	0.7		

(OTHER BENEFITS IN 2030									
	*	Direct GHG emissions reduced by → 72 Thousand Tonnes						onnes		
		Reduced emissions by	→	SO2	2 Thous Tonnes		NOx	1 Thousand Tonnes		

ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): A 30 or 36% reduction in energy-related carbon dioxide emissions by 2030, compared to business as usual.

Country Specific Data and Input Assumptions

For Macedonia, FYR



GENERAL INFORMATION					
Population	2.1 million				
GDP per capita	12,287 US\$				
Electrification level	100%				
CO2 Emission Factor	0.764 kg / kWh				

ELECTRICITY MARKET						
Residential Electricity tariff	0.090 US\$ / kWh					
Industrial Electricity tariff	0.10 US\$ / kWh					
Transmission and	14.68%					
distribution loss factor						

ASSUMPTIONS

Product		Unit Energy Co	onsumption (kWh/yea	Type of Product	
		BAU Policy Scenario BAT		Type of Product	
4	Lighting	65.7	15.3	8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED
	Residential Refrigerators	450	212	139	2-door top-mount Average size 300 liters
	Room Air Conditioners	1 225	884	579	Split unit with 3.5 kW cooling capacity
<u>#</u>	Transformers	N/A	SEAD Tier3	SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power and distribution transformer
	Industrial Electric Motors	IE1/IE0	IE3	IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW

METHODOLOGY

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.















