


Saudi Arabia



Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

Reduce electricity use → by over 29 TWh → 6.7% of future national electricity use Save electricity worth 1 Billion USD equivalent to 13 Power Plants [500MW] Reduce CO₂ emissions by 20 Million Tonnes equivalent to 10 Million Passenger Cars



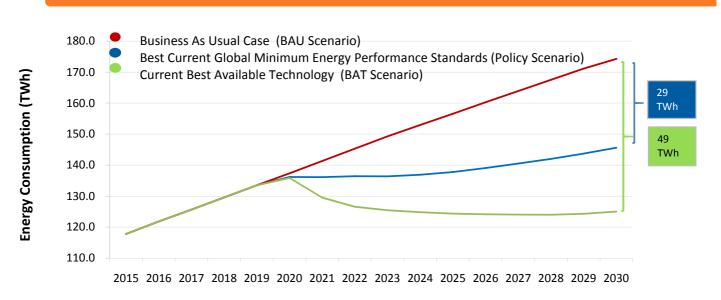

THE PATHWAY TO ENERGY EFFICIENCY





ANNUAL SAVINGS IN 2025 AND 2030											
		Ligh	nting		ential erators		m Air tioners	Ľ	ormers	Indu:	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
•	Electricity (TWh)	8.0	8.2	0.8	1.5	2.2	3.6	7.5	14.5	0.3	0.8
فَفَفَ	Electricity Bills (million US\$)	400.1	412.4	40.4	77.2	109.5	181.1	374.1	724.6	13.8	30.1
CO2	CO2 Emissions (million tonnes)	6.4	6.6	0.6	1.2	1.8	2.9	5.6	10.9	0.3	0.6

CUMULATIVE SAVINGS (2020 - 2030)								
		4	Residential	Room Air	<u>**</u>	Industrial		
		Lighting	Refrigerators	Conditioners	Transformers	Electric Motors		
	Electricity (TWh)	70.3	8.7	22.5	83.8	3.9		
ååå	Electricity Bills (billion US\$)	3.5	0.4	1.1	4.2	0.2		
CO ₂	CO2 Emissions (million tonnes)	56.4	7.0	18.0	62.8	3.2		
OTHER REAL	IFFITC IN 2020							

	OTHER BEN	R BEINEFITS IIN 2030							
_	*	Direct GHG emissions reduced by	→	6 Million Tonnes					
	ååå	Reduced electricity subsidies by		2 Billion USD					

ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): An "ambitious" programme of renewable energy investment and "economic diversification", along with energy efficiency and carbon capture and storage. Expects emissions savings of up to 130 million tonnes of CO2 equivalent in 2030, relative to business as usual.

Country Specific Data and Input Assumptions

For Saudi Arabia

ASSUMPTIONS



GENERAL INFORMATION	
Population	29.4 million
GDP per capita	25,409 US\$
Electrification level	99%
CO2 Emission Factor	0.749 kg / kWh

ELECTRICITY MARKET					
Residential Electricity tariff	0.050 US\$ / kWh				
Industrial Electricity tariff	0.040 US\$ / kWh				
Transmission and	6.68%				
distribution loss factor					

and distribution transformers

3-phase induction motors

0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW

Ranging from:

Product		Unit Energy Co	onsumption (kWh/yea	Type of Product	
		BAU	BAU Policy Scenario BAT		Type of Froduct
4	Lighting	65.7	15.3	X X	Low incandescent Lamp,3h/day; 14W CFL; 8W LED
	Residential Refrigerators	500	231	167	2-door top-mount Average size 350 liters
	Room Air Conditioners	2 439	1,989	1,303	Split unit with 3.5 kW cooling capacity
7	Transformers	N/A	SEAD Tier3	SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power

METHODOLOGY

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

IE3

ASSUMPTIONS AND DATA SOURCES

Industrial Electric Motors

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.

IE1/IE0

- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.













IE4



