


Singapore






Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

ANNUAL SAVINGS IN 2030						
	Reduce electricity use					
•	→ by over 4 TWh					
	→ 4.8% of future national electricity use					
ààà	Save electricity worth 620 Million USD					
	equivalent to 10 Power Plants [100MW]					
CO ₂	Reduce CO ₂ emissions by 2 Million Tonnes					
	equivalent to 1 Million Passenger Cars	AAAAA				

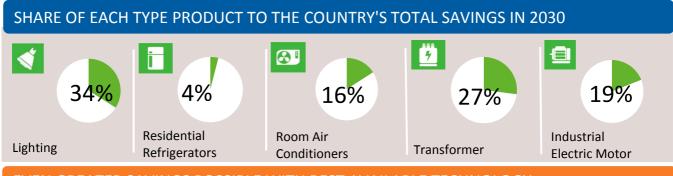

EVEN GREATER SAVINGS POSSIBLE WITH BEST AVAILABLE TECHNOLOGY

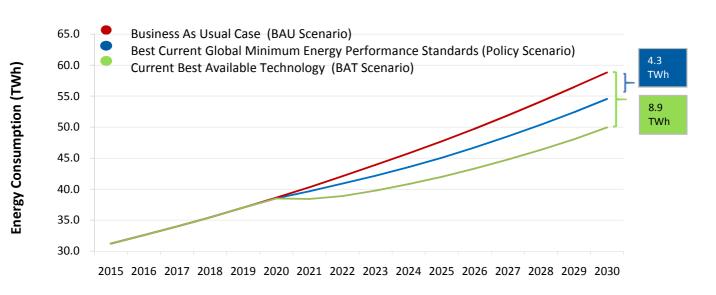

THE PATHWAY TO ENERGY EFFICIENCY





ANNUAL SAVINGS IN 2025 AND 2030											
		Lighting			ential erators	Room Air Conditioners		Transformers		Industrial Electric Motors	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
	Electricity (GWh)	1,207.5	1,455.5	83.2	163.4	422.4	680.4	584.6	1,145.7	344.8	811.1
فْفْف	Electricity Bills (million US\$)	181.1	218.3	12.5	24.5	63.4	102.1	87.7	171.9	44.8	105.4
CO ₂	CO2 Emissions (thousand tonnes)	745.5	898.7	51.4	100.9	260.8	420.1	289.4	567.1	212.9	500.8

CUMULATIVE SAVINGS (2020 - 2030)							
		4	i		7		
		Lighting	Residential Refrigerators	Room Air Conditioners	Transformers	Industrial Electric Motors	
0	Electricity (TWh)	11.2	0.9	4.3	6.6	4.1	
ààà	Electricity Bills (billion US\$)	1.7	0.1	0.6	1.0	0.5	
CO2	CO2 Emissions (million tonnes)	6.9	0.6	2.7	3.3	2.5	

OTHER BENEFITS IN 2030						
*	Direct GHG emissions reduced by → 991 Thousand Tonnes					
	Reduced emissions by → SO2 226 Tonnes NOx 122 Tonnes					

ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): Intends to reduce its Emissions Intensity by 36% from 2005 levels by 2030, and stabilize its emissions with the aim of peaking around 2030.

Country Specific Data and Input Assumptions

For Singapore

ASSUMPTIONS



Ranging from:

0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW

GENERAL INFORMATION	
Population	5.5 million
GDP per capita	56,287 US\$
Electrification level	100%
CO2 Emission Factor	0.495 kg / kWh

ELECTRICITY MARKET				
Residential Electricity tariff	0.150 US\$ / kWh			
Industrial Electricity tariff	0.130 US\$ / kWh			
Transmission and	19.83%			
distribution loss factor				

Product		Unit Energy Co	onsumption (kWh/yea	Turns of Duadwat	
		BAU	BAU Policy Scenario BAT		Type of Product
4	Lighting	65.7	15.3	8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED
	Residential Refrigerators	352	207	159	2-door top-mount Average size 280 liters
	Room Air Conditioners	3 150	2,647	1,740	Split unit with 3.5 kW cooling capacity
<u>#</u>	Transformers	N/A	SEAD Tier3	SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power and distribution transformers
					3-phase induction motors

METHODOLOGY

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

IE3

ASSUMPTIONS AND DATA SOURCES

Industrial Electric Motors

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.

IE1/IE0

- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.













IE4



