


Serbia




Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

ANNUAL SAVINGS IN 2030

	Reduce electricity use	
	→ by over 2 TWh	
	→ 4.0% of future national electricity use	
ààà	Save electricity worth 120 Million USD	
	equivalent to 4 Power Plants [100MW]	
CO ₂	Reduce CO ₂ emissions by 1 Million Tonnes	
	equivalent to 810 Thousand Passenger Cars	ക്കു ക്കു കു എ കു കു കു

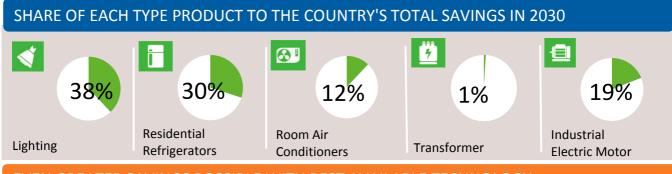

EVEN GREATER SAVINGS POSSIBLE WITH BEST AVAILABLE TECHNOLOGY

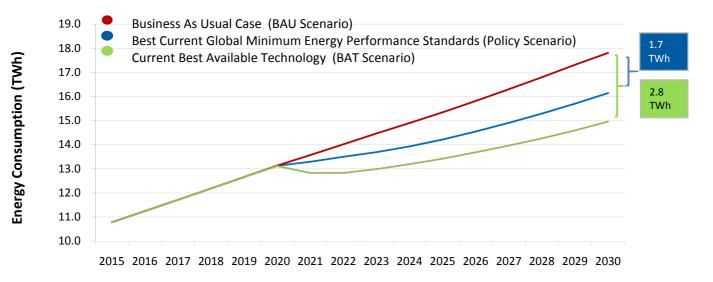

THE PATHWAY TO ENERGY EFFICIENCY



ANNUAL SAVINGS IN 2025 AND 2030

		Lighting			ential erators	Room Air Conditioners		Transformers		Industrial Electric Motors	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
	Electricity (GWh)	634.1	639.9	269.6	496.3	69.1	210.7	6.2	5.6	154.3	317.6
ààà	Electricity Bills (million US\$)	44.4	44.8	18.9	34.7	4.8	14.7	0.4	0.4	10.8	22.2
CO2	CO2 Emissions (thousand tonnes)	553.7	558.8	235.4	433.4	60.4	184.0	4.6	4.2	134.7	275.2

CUMULATIVE SAVINGS (2020 - 2030)								
		1	Ī		<u>67</u>			
		Lighting	Residential Refrigerators	Room Air Conditioners	Transformers	Industrial Electric Motors		
	Electricity (TWh)	5.6	2.9	0.9	0.1	1.7		
ààà	Electricity Bills (million US\$)	388.9	200.7	64.9	4.7	120.2		
C02	CO2 Emissions (million tonnes)	4.9	2.5	0.8	0.1	1.5		

OTHER BENEFITS IN 2030							
*	Direct GHG emissions re	educed by	→ 4	157 Thousand	Tonnes		
<u> </u>	Reduced emissions by	→ SO2	8 Thousar Tonnes	nd NOx	4 Thousand Tonnes		

ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): A 9.8% reduction on 1990 levels by 2030.

Country Specific Data and Input Assumptions

For Serbia

GENERAL INFORMATION				RICITY MARKET		
Population	7.1 million		Residential Electricity tariff		0.070 US\$ / kWh	
GDP per capita	12,717 US\$		Industrial Electricity tariff		0.070 US\$ / kWh	
Electrification level	100%		Transmission and		14.68%	
CO2 Emission Factor	0.745 kg / kWh		distribu	ition loss factor		
ASSUMPTIONS						
Product	Unit Energy Consumption (kWh/year) or Efficiency Level			Type of Product		
Troduct	BAU	Policy Sce	enario	BAT		
Lighting	65.7	15.3		8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED	
Residential Refrigerators	450	212		139	2-door top-mount Average size 300 liters	
Room Air Conditioners	919	663		434	Split unit with 3.5 kW cooling capacity	
Transformers	N/A	SEAD Tier3		SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power and distribution transformer	
Industrial Electric Motors	IE1/IE0	IE3		IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW	

METHODOLOGY

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- are emissions in the BAU compared to the best alternative with natural rerigerants (mostly R290 tor splits and R600a for domestic reri
- Additional to the above sources, a questionnaire was used to gather data from country officials.









