



# **Swaziland**



Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

# Reduce electricity use → by over 155 GWh → 4.1% of future national electricity use Save electricity worth 10 Million USD equivalent to 2 Power Plants [20MW] Reduce CO₂ emissions by 110 Thousand Tonnes equivalent to 60 Thousand Passenger Cars

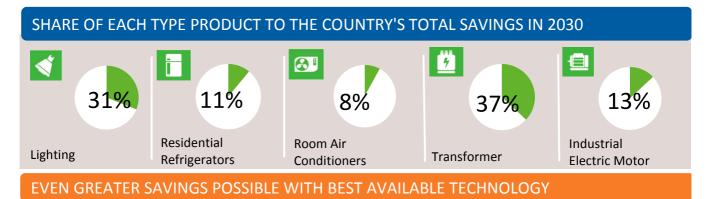

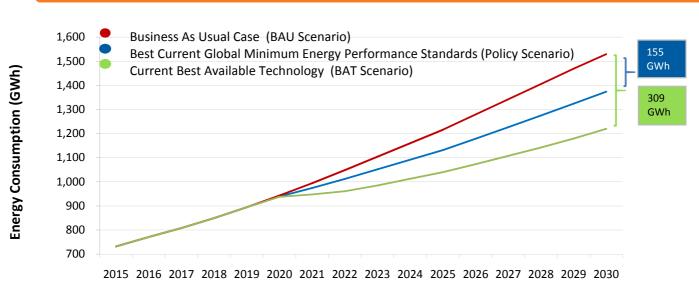

# THE PATHWAY TO ENERGY EFFICIENCY





ANNUAL SAVINGS IN 2025 AND 2030											
		Lighting			ential erators	Room Air Conditioners		Transformers		Industrial Electric Motors	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
	Electricity (GWh)	32.8	48.1	7.8	16.3	6.5	14.3	27.4	57.0	9.5	19.6
ååå	Electricity Bills (thousand US\$)	2,395.6	3,510.8	569.2	1,191.3	473.4	1,046.9	2,002.8	4,162.3	957.5	1,986.8
CO <sub>2</sub>	CO2 Emissions (thousand tonnes)	23.2	34.1	5.5	11.6	4.6	10.2	17.6	36.7	6.7	13.9

CUMULATIVE SAVINGS (2020 - 2030)								
		Lighting	Residential Refrigerators	Room Air Conditioners	Transformers	Industrial Electric Motors		
	Electricity (GWh)	326.8	87.3	74.6	315.5	105.6		
ååå	Electricity Bills (million US\$)	23.9	6.4	5.4	23.0	10.7		
CO <sub>2</sub>	CO2 Emissions (thousand tonnes)	231.5	61.8	52.8	202.9	74.8		

OTHER BENEFITS IN 2030						
*	Direct GHG emissions reduced by	<b>→</b>	27 Thousand Tonnes			
	Increased grid connection to	<b>→</b>	78 Thousand Households			

## ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): 1) Developing a robust national GHG inventory, a credible and a comprehensive MRV system. 2) Doubling the share of RE in the national energy mix. 3) Introducing the use of a 10% ethanol blend in petrol for use in all vehicles. 4) Phasing out the use of HFCs, PFCs, and SF6 gases.

# Country Specific Data and Input Assumptions

# For Swaziland



GENERAL INFORMATION	
Population	1.3 million
GDP per capita	2,682 US\$
Electrification level	27%
CO2 Emission Factor	0.643 kg / kWh

ELECTRICITY MARKET	
Residential Electricity tariff	0.073 US\$ / kWh
Industrial Electricity tariff	0.101 US\$ / kWh
Transmission and	9.18%
distribution loss factor	

A۵	Sι	JIV	IP I	ш	1/12

Product		Unit Energy Co	onsumption (kWh/yea	Type of Product	
		BAU Policy Scenario BAT		Type of Froduct	
<b>4</b>	Lighting	65.7	15.3	8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED
	Residential Refrigerators	325	191	134	2-door top-mount Average size 225 liters
	Room Air Conditioners	1.897	1,547	1,014	Split unit with 3.5 kW cooling capacity
<u>#</u>	Transformers	N/A	SEAD Tier3	SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power and distribution transformers
	Industrial Electric Motors	IE1/IE0	IE3	IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW

### **METHODOLOGY**

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

### ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.















