



# Thailand



Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

## ANNUAL SAVINGS IN 2030



Reduce electricity use

→ by over **23 TWh**

→ **7.5%** of future national electricity use



Save electricity worth **2 Billion USD**

equivalent to **11 Power Plants [500MW]**



Reduce CO<sub>2</sub> emissions by **10 Million Tonnes**

equivalent to **8 Million Passenger Cars**



## SHARE OF EACH TYPE PRODUCT TO THE COUNTRY'S TOTAL SAVINGS IN 2030



22%

Lighting



13%

Residential Refrigerators



9%

Room Air Conditioners



30%


Transformer



26%

Industrial Electric Motor



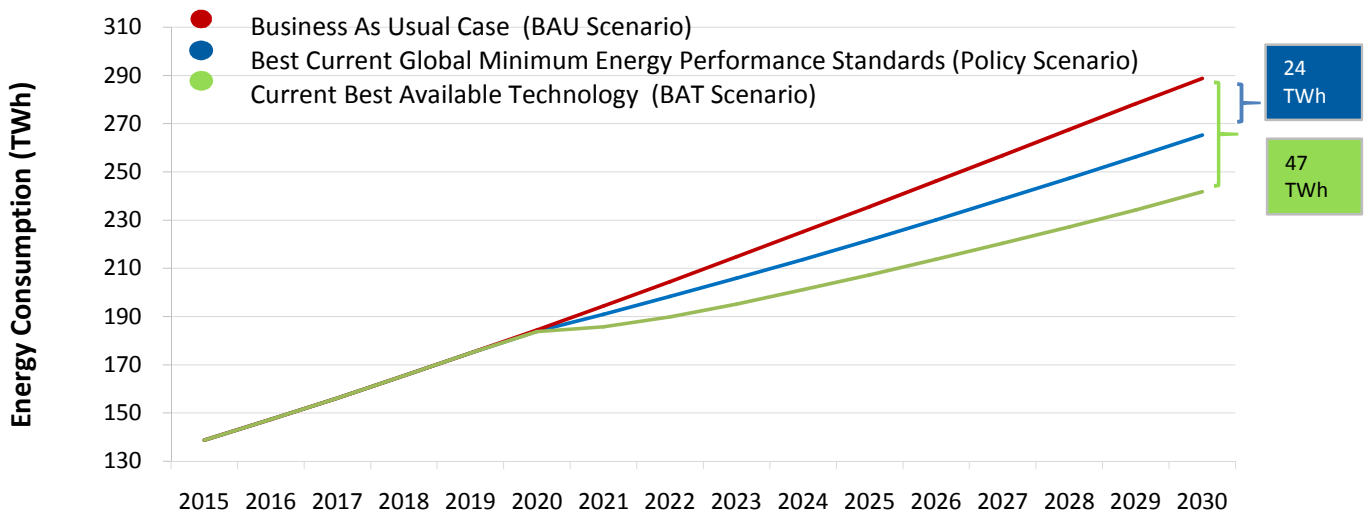





## EVEN GREATER SAVINGS POSSIBLE WITH BEST AVAILABLE TECHNOLOGY











# THE PATHWAY TO ENERGY EFFICIENCY






## ANNUAL SAVINGS IN 2025 AND 2030

											
		Lighting		Residential Refrigerators		Room Air Conditioners		Transformers		Industrial Electric Motors	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
	Electricity (TWh)	4.4	5.2	1.6	3.0	1.4	1.9	3.6	7.2	2.8	6.1
	Electricity Bills (million US\$)	392.2	472.3	144.8	269.7	129.4	174.0	328.0	643.7	304.1	675.1
	CO2 Emissions (thousand tonnes)	2,804.8	3,377.2	1,035.2	1,928.9	925.2	1,244.1	1,880.8	3,690.5	1,779.4	3,949.8

## CUMULATIVE SAVINGS (2020 - 2030)

											
		Lighting		Residential Refrigerators		Room Air Conditioners		Transformers		Industrial Electric Motors	
			Electricity (TWh)	40.3	17.2	13.7	41.0	31.8			
	Electricity Bills (billion US\$)	3.6	1.6	1.2	3.7	3.5					
	CO2 Emissions (million tonnes)	25.9	11.1	8.8	21.2	20.4					

## OTHER BENEFITS IN 2030

	Direct GHG emissions reduced by	→	<b>22 Million Tonnes</b>
	Reduced electricity subsidies by	→	<b>43 Million USD</b>
	Reduced emissions by	→	<b>SO2 31 Thousand Tonnes</b> <b>NOx 17 Thousand Tonnes</b>

## ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): Thailand intends to reduce its greenhouse gas emissions by 20 percent from the projected business-as-usual (BAU) level by 2030.

The level of contribution could increase up to 25 percent, subject to adequate and enhanced access to technology development and transfer, financial resources and capacity building support through a balanced and ambitious global agreement under the United Nations Framework Convention on Climate Change (UNFCCC).

# Country Specific Data and Input Assumptions For Thailand



## GENERAL INFORMATION

Population	67.2 million
GDP per capita	5,561 US\$
Electrification level	99%
CO2 Emission Factor	0.516 kg / kWh

## ELECTRICITY MARKET

Residential Electricity tariff	0.090 US\$ / kWh
Industrial Electricity tariff	0.110 US\$ / kWh
Transmission and distribution loss factor	19.83%

## ASSUMPTIONS

Product	Unit Energy Consumption (kWh/year) or Efficiency Level			Type of Product
	BAU	Policy Scenario	BAT	
Lighting	65.7	15.3	8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED
Residential Refrigerators	352	207	159	2-door top-mount Average size 280 liters
Room Air Conditioners	2,965	2,647	1,734	Split unit with 3.5 kW cooling capacity
Transformers	N/A	SEAD Tier3	SEAD Tier5	three-phase and single-phase liquid-filled and three-phase dry-type power and distribution transformers
Industrial Electric Motors	IE1/IE0	IE3	IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW; 75 - 375 kW

### METHODOLOGY

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

### ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.

