


A summary of the benefits attained from improved energy efficiency through the implementation of Minimum Energy Performance Standards at two levels of ambition (minimum and high). More detailed reports for lighting, cooling and equipment can be downloaded from the United Nations Environment Programme (UNEP) United For Efficiency (U4E) website.

ANNUAL SAVINGS IN 2030*




ELECTRICITY SAVINGS OVER TIME*

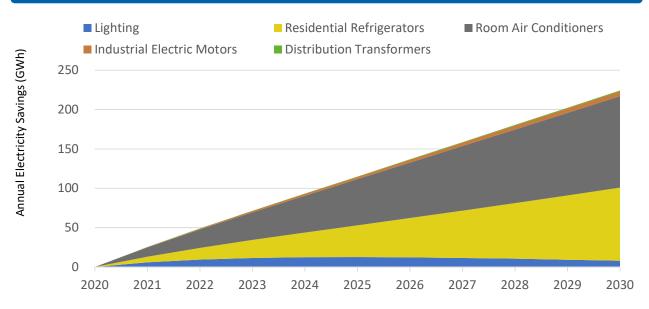


AND EVEN MORE BENEFITS



THE MORE AMBITIOUS THE REGULATION, THE MORE SAVINGS ARE POSSIBLE

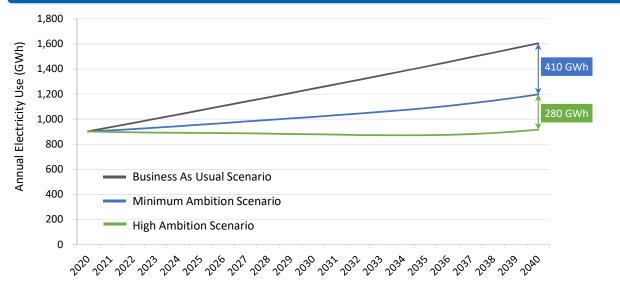

MEET GLOBAL CLIMATE GOALS BY SIGNIFICANTLY DECREASED EMISSIONS

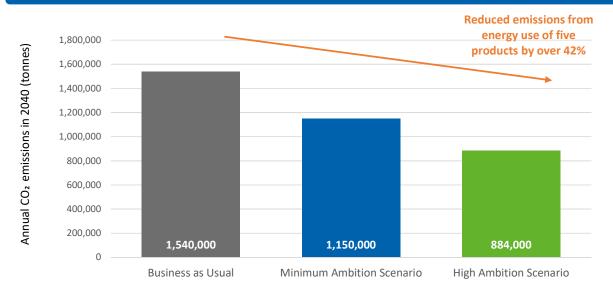

OTHER BENEFITS ACHIEVED IN 2030*



Increased grid connection to

Reduced electricity subsidies by

- Reduced direct GHG emissions by
- **110 Thousand households**
 - 5 Million US\$
 - **20 Thousand tonnes**

DETAILED BENEFITS




ANNUAL SAVINGS IN 2030 AND 2040*											
		Lighting		Coo				Equip		ment 🧭	
				Residential Refrigerators		Roor Condit			strial Motors	Distribution Transformers	
		2030	2040	2030	2040	2030	2040	2030	2040	2030	2040
4	Electricity (MWh)	7,900	490	93,000	200,000	120,000	190,000	6,300	14,000	1,100	2,600
<u>*</u>	Electricity Bills (Thousand US\$)	830	51	9,800	21,000	12,000	20,000	660	1,500	120	280
	CO2 Emissions (Tonnes)	91,000	480	91,000	190,000	110,000	190,000	6,200	14,000	1,100	2,600

CUMULATIVE SAVINGS BY 2030 AND 2040*

		Lighting		Cooling				Equip	nent 🥑		
				Resid Refrige	ential erators		m Air tioners		strial Motors	Distril Transfe	
		2030	2040	2030	2040	2030	2040	2030	2040	2030	2040
4	Electricity (GWh)	100	130	470	2,000	640	2,300	34	140	6.0	25
<u>*</u>	Electricity Bills (Million US\$)	11	13	50	210	67	240	3.5	15	0.6	2.7
	CO2 Emissions (Thousand tonnes)	100	120	460	2,000	630	2,300	33	140	5.9	25

CONTRIBUTION TO CUMULATIVE ELECTRICITY USE BY 2040

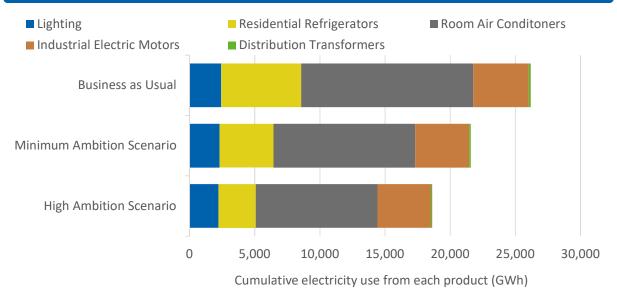

Country Data and Input Assumptions



GENERAL INFORMATION ELECTRICITY MARKET Population 11 Million **Residential Electricity tariff** 868 US\$ GDP per capita **Electrification level** 33.6% CO2 Emission Factor 0.39 kg / kWh

0.11 US\$ / kWh

Transmission and distribution loss factor	60.1%
---	-------

ASSUMPTIONS

Product		Unit En Busines Usua	s As	nsumption (kWh/yea Minimum Ambition Scenario		r) or Efficiency Level High Ambition Scenario		Type of Product		
Lighting		GSL	15W CFL	15	10W LED	10 60	7W LED	7	800 lumen light bulb: 1,000 hrs/year	
Light		Linear HID	36W T8 70W HPS	108 307	20W LED 50W LED	219	16W LED 40W LED	48 175	4 foot tube: 3,000 hrs/year Poletop street light: 4,380hrs/year	
Cooling		Residential Refrigerators	471		307		154		2-door refrigerator freezer of average size 270 liters	
		Room Air Conditioners	1,761		1,952		1,174		A mix of 3.5 kW and 7 kW split units with a weighted-average cooling capacity of 4.4 kW	
Equipment		Industrial Electric Motors IEO (IEC level)			IE2		IE3		3-phase induction motors used in the industrial sector	
Equip		Distribution Transformers (Model regulation level)	See note		Level 1		Level 2		Three-phase and single-phase liquid- filled and three-phase dry-type power distribution transformers	

Distribution transformers Note: it is assumed that distribution transformers have losses in line with those assumed in the CENELEC harmonization research for the development of the EU standards.

METHODOLOGY

The analysis uses the UNEP-U4E's Country Savings Assessment Models to estimate the impacts of implementing policies that improve the energy efficiency of each product analysed. The savings potential in each scenario assumes Minimum Energy Performance Standards (MEPS) are introduced in 2020 at two different levels of ambition (minimum and high) as shown above.

ASSUMPTIONS AND DATA SOURCES

Market size is based on data from industry partners, the UN COMTRADE database and market penetration forecasts generated by U4E Country Savings Assessment Models using data on population, climate, income and other macroeconomic indicators as detailed below.

Population (2018 and future forecasts) comes from the UN Population Division.

- GDP per capita data (2018) comes from the World Bank with future growth forecasts derived from the IPCC's SSP3 scenario.
- Cooling Degree Days are based on average monthly temperatures from weatherbase.com, degreedays.net or given by wunderground.com.

Current total electricity consumption comes from the World Bank and the U.S. Energy Information Administration (EIA) with future forecasts derived from the International Energy Agency's (IEA) World Energy Outlook 2018.

Residential electricity tariffs are based on IEA data.

Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.

Electrification levels come from the IEA's Word Energy Outlook 2018 and the World Bank.

CO2 emission factors come from the IEA and the Institute of Global Environmental Strategies (IGES) and are assumed constant in future years.

Product typical characteristics are based on analysis from the UNEP-U4E Model Regulation Guidelines and other data from UNEP-U4E industry partners and technical experts including the US Lawrence Berkeley National Laboratory (LBNL), the International Copper Association (ICA) and GIZ.

The approach of calculating the potential direct emissions saving of refrigerators and air conditioners is based on expert input from GIZ and LBNL.

Additional to the above sources, a questionnaire was used to gather data from country officials.

In a small number of instances, additional data was obtained from internet research or by using proxy data from similar markets.

Further details of the modelling approach and assumptions are available on the U4E website. For more information contact: U4E@un.org











