



# Lao People's Dem. Rep.





A summary of the benefits attained from improved energy efficiency through the implementation of Minimum Energy Performance Standards at two levels of ambition (minimum and high). More detailed reports for lighting, cooling and equipment can be downloaded from the United Nations Environment Programme (UNEP) United For Efficiency (U4E) website.

# Reduce electricity use by over 360 GWh which is 6.7% of current national electricity use Save electricity worth 26 Million US\$ equivalent to over 4 Power Plants [20MW each] Reduce electricity CO<sub>2</sub> emissions by over 210 Thousand tonnes equivalent to 120 Thousand Passenger Cars

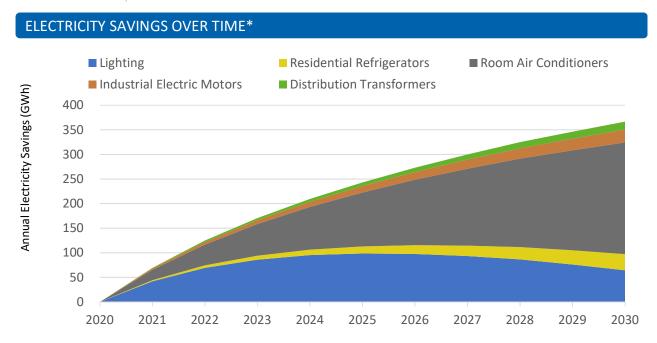


<sup>\*</sup> Denotes savings are from the Minimum Ambition Scenario. U4E COUNTRY ASSESSMENT, SEPTEMBER 2019


# AND EVEN MORE BENEFITS



## THE MORE AMBITIOUS THE REGULATION, THE MORE SAVINGS ARE POSSIBLE

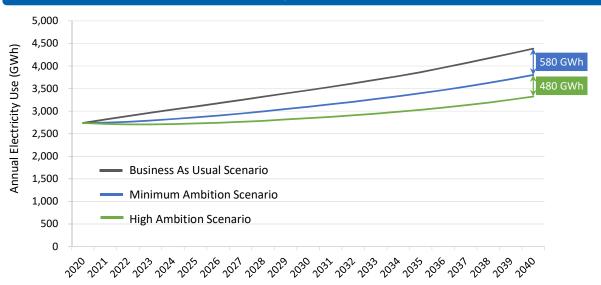

### MEET GLOBAL CLIMATE GOALS BY SIGNIFICANTLY DECREASED EMISSIONS

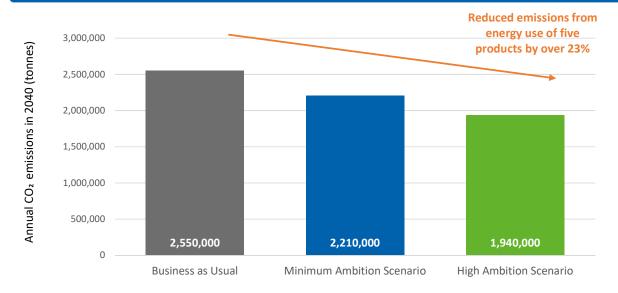

### OTHER BENEFITS ACHIEVED IN 2030\*



Reduced direct GHG emissions by

**40 Thousand tonnes** 


# **DETAILED BENEFITS**



| ANNUAL SAVINGS IN 2030 AND 2040*        |                                   |          |      |                              |        |                          |         |                               |        |                              |        |
|---|-----------------------------------|----------|------|------------------------------|--------|--------------------------|---------|-------------------------------|--------|------------------------------|--------|
|   |                                   | Lighting | (1)  | Cooling                      |        |                          | Equip   |                               | ment   |                              |        |
|   |                                   |          |      | Residential<br>Refrigerators |        | Room Air<br>Conditioners |         | Industrial<br>Electric Motors |        | Distribution<br>Transformers |        |
|   |                                   | 2030     | 2040 | 2030                         | 2040   | 2030                     | 2040    | 2030                          | 2040   | 2030                         | 2040   |
| 4                                       | Electricity (MWh)                 | 64,000   | 890  | 33,000                       | 77,000 | 230,000                  | 410,000 | 26,000                        | 55,000 | 16,000                       | 39,000 |
| <u>*</u>                                | Electricity Bills (Thousand US\$) | 4,500    | 62   | 2,300                        | 5,400  | 16,000                   | 29,000  | 1,800                         | 3,800  | 1,100                        | 2,800  |
| 4                                       | CO2 Emissions<br>(Tonnes)         | 20,000   | 530  | 20,000                       | 46,000 | 140,000                  | 250,000 | 16,000                        | 33,000 | 9,500                        | 23,000 |
| CLIMITI ATIVE SAVINGS BY 2020 AND 2040* |                                   |          |      |                              |        |                          |         |                               |        |                              |        |

### CUMULATIVE SAVINGS BY 2030 AND 2040 Cooling Equipment Lighting Residential Room Air Industrial Distribution Refrigerators **Conditioners Electric Motors Transformers** 2030 2040 2030 2040 2030 2040 2030 2040 2030 2040 Electricity (GWh) 810 960 170 740 1,200 4,600 150 560 83 360 **Electricity Bills** 330 57 67 12 52 86 10 39 5.8 25 (Million US\$) **CO2** Emissions 480 570 100 440 730 2,800 87 330 49 220 (Thousand tonnes)

# ■ Lighting ■ Residential Refrigerators ■ Industrial Electric Motors ■ Distribution Transformers

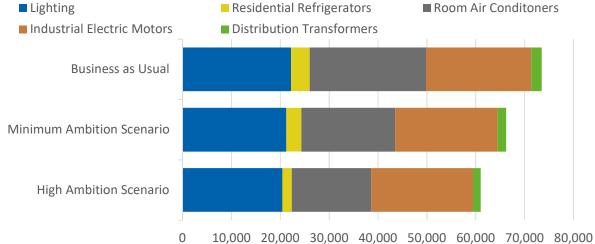

Cumulative electricity use from each product (TWh)

<sup>\*</sup> Denotes savings are from the Minimum Ambition Scenario. U4E COUNTRY ASSESSMENT, SEPTEMBER 2019

# **Country Data and Input Assumptions**



| GENERAL INFORMATIO    | N             | ELECTRICITY MARKET             | ELECTRICITY MARKET |  |  |  |  |
|-----------------------|---------------|--------------------------------|--------------------|--|--|--|--|
| Population            | 6.86 Million  | Residential Electricity tariff | 0.07 US\$ / kWh    |  |  |  |  |
| GDP per capita        | 2,568 US\$    |                                |                    |  |  |  |  |
| Electrification level | 96.1%         | Transmission and               | 6.2%               |  |  |  |  |
| CO2 Emission Factor   | 0.56 kg / kWh | distribution loss factor       |                    |  |  |  |  |

| ASSL | 18 4 | D-T-1 | $\sim$ | 10 |
|------|------|-------|--------|----|
|      |      |       |        |    |
|      |      |       |        |    |

|           |            |  | Unit Energy Consumption (kWh/year) or Efficiency Level |                           |         |                           |         |                 |  |
|-----------|------------|--|--|---------------------------|---------|---------------------------|---------|-----------------|--|
| Product   |            | Business As<br>Usual                               |  | Minimum Ambition Scenario |         | High Ambition<br>Scenario |         | Type of Product |  |
|           |            |  |  |                           |         |                           |         |                 |  |
| ng        |            | GSL  | 15W CFL  | 15                        | 10W LED | 10                        | 7W LED  | 7               | 800 lumen light bulb: 1,000 hrs/year   |
| Lighting  |            | Linear   | 36W T8   | 108                       | 20W LED | 60                        | 16W LED | 48              | 4 foot tube: 3,000 hrs/year  |
| Lig.      |            | HID  | 70W HPS  | 307                       | 50W LED | 219                       | 40W LED | 175             | Poletop street light: 4,380hrs/year  |
| Cooling   |            | Residential<br>Refrigerators                       | 342  |                           | 302     |                           | 151     |                 | 2-door refrigerator freezer of average size 250 liters   |
| Coo       | <b>3</b> 1 | Room Air<br>Conditioners                           | 1,654  |                           | 1,815   |                           | 1,104   |                 | A mix of 3.5 kW and 7 kW split units with a weighted-average cooling capacity of 4.2 kW                    |
| Equipment |            | Industrial Electric<br>Motors<br>(IEC level)       | IEO  |                           | IE2     |                           | IE3     |                 | 3-phase induction motors used in the industrial sector   |
| Equip     | 7          | Distribution Transformers (Model regulation level) | See note   |                           | Level 1 |                           | Level 2 |                 | Three-phase and single-phase liquid-<br>filled and three-phase dry-type power<br>distribution transformers |

Distribution transformers Note: it is assumed that distribution transformers have losses in line with those assumed in the CENELEC harmonization research for the development of the EU standards.

### METHODOLOGY

The analysis uses the UNEP-U4E's Country Savings Assessment Models to estimate the impacts of implementing policies that improve the energy efficiency of each product analysed. The savings potential in each scenario assumes Minimum Energy Performance Standards (MEPS) are introduced in 2020 at two different levels of ambition (minimum and high) as shown above.

### ASSUMPTIONS AND DATA SOURCES

- Market size is based on data from industry partners, the UN COMTRADE database and market penetration forecasts generated by U4E Country Savings Assessment Models using data on population, climate, income and other macroeconomic indicators as detailed below.
- Population (2018 and future forecasts) comes from the UN Population Division.
- GDP per capita data (2018) comes from the World Bank with future growth forecasts derived from the IPCC's SSP3 scenario.
- Cooling Degree Days are based on average monthly temperatures from weatherbase.com, degreedays.net or given by wunderground.com.
- Current total electricity consumption comes from the World Bank and the U.S. Energy Information Administration (EIA) with future forecasts derived from the International Energy Agency's (IEA) World Energy Outlook 2018.
- Residential electricity tariffs are based on IEA data.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- Electrification levels come from the IEA's Word Energy Outlook 2018 and the World Bank.
- CO2 emission factors come from the IEA and the Institute of Global Environmental Strategies (IGES) and are assumed constant in future years.
- Product typical characteristics are based on analysis from the UNEP-U4E Model Regulation Guidelines and other data from UNEP-U4E industry partners and technical experts including the US Lawrence Berkeley National Laboratory (LBNL), the International Copper Association (ICA) and GIZ.
- The approach of calculating the potential direct emissions saving of refrigerators and air conditioners is based on expert input from GIZ and LBNL.
- Additional to the above sources, a questionnaire was used to gather data from country officials.
- In a small number of instances, additional data was obtained from internet research or by using proxy data from similar markets.

Further details of the modelling approach and assumptions are available on the U4E website. For more information contact: U4E@un.org













