



# **Ecuador**





A summary of the benefits attained from improved energy efficiency through the implementation of Minimum Energy Performance Standards at two levels of ambition (minimum and high). More detailed reports for lighting, cooling and equipment can be downloaded from the United Nations Environment Programme (UNEP) United For Efficiency (U4E) website.

# Reduce electricity use by over 1.4 TWh which is 4.9% of current national electricity use Save electricity worth 140 Million US\$ equivalent to over 3 Power Plants [100MW each] Reduce electricity CO<sub>2</sub> emissions by over 1.1 Million tonnes equivalent to 660 Thousand Passenger Cars

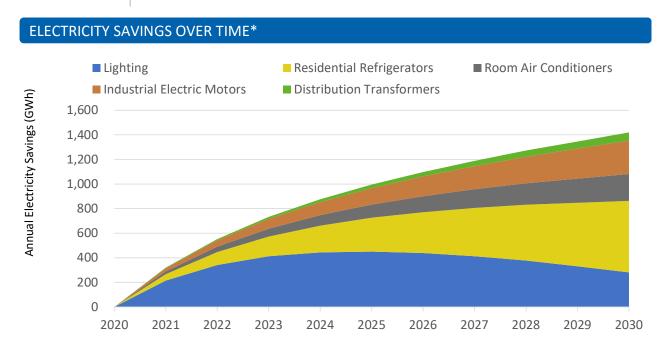


<sup>\*</sup> Denotes savings are from the Minimum Ambition Scenario.

U4E COUNTRY ASSESSMENT, OCTOBER 2020 (UPDATE)


## AND EVEN MORE BENEFITS



# THE MORE AMBITIOUS THE REGULATION, THE MORE SAVINGS ARE POSSIBLE

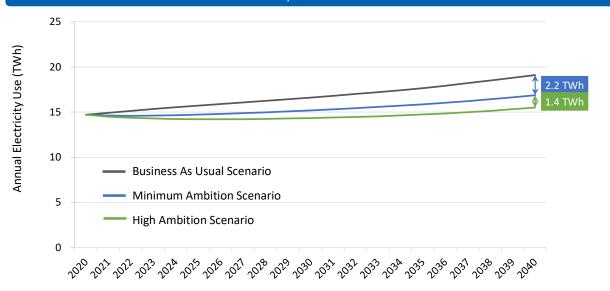

#### MEET GLOBAL CLIMATE GOALS BY SIGNIFICANTLY DECREASED EMISSIONS

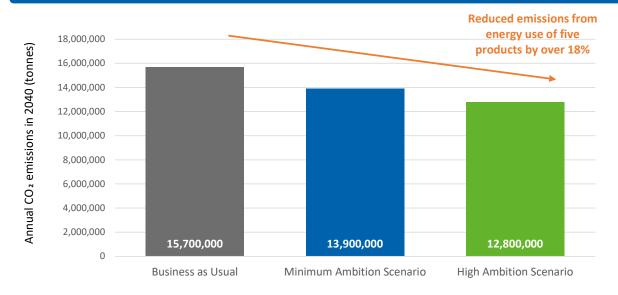

#### OTHER BENEFITS ACHIEVED IN 2030\*



Reduced cumulative direct GHG emissions by

92 Thousand tonnes

# **DETAILED BENEFITS**




ANNUAL SAVINGS IN 2030 AND 2040*											
		Lighting	(1)		Coo	ling	(A)		Equip	ment	7
					ential erators		m Air tioners		strial Motors		oution ormers
		2030	2040	2030	2040	2030	2040	2030	2040	2030	2040
4	Electricity (GWh)	280	17	580	1,100	220	380	270	590	65	160
<u>*</u>	Electricity Bills (Million US\$)	28	1.6	57	110	21	37	27	58	6.4	16
4	CO2 Emissions (Thousand tonnes)	230	14	480	900	180	320	230	490	54	130

	(Inousand tonnes)										
CUMULATIVE SAVINGS BY 2030 AND 2040*											
		Lighting	<b>(3)</b>		Coo	ling	<b>⊗</b> ¹		Equip	ment	7
					ential erators	Roor Condit	n Air ioners		strial Motors	Distrik Transfo	oution ormers
		2030	2040	2030	2040	2030	2040	2030	2040	2030	2040
4	Electricity (TWh)	3.7	4.5	3.1	12	1.2	4.4	1.5	5.9	0.3	1.5
<u>*</u>	Electricity Bills (Million US\$)	360	440	300	1,200	120	430	140	580	33	150
4	CO2 Emissions (Million tonnes)	3.1	3.8	2.6	10	1.0	3.7	1.2	4.9	0.3	1.2

### ■ Lighting ■ Residential Refrigerators ■ Room Air Conditoners ■ Industrial Electric Motors ■ Distribution Transformers **Business as Usual**

CONTRIBUTION TO CUMULATIVE ELECTRICITY USE BY 2040

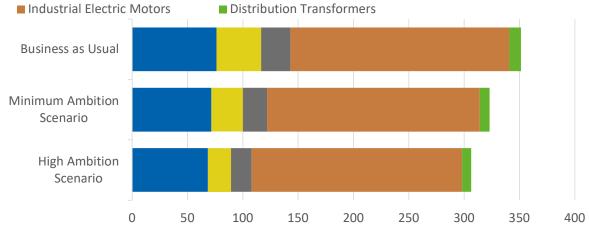

Cumulative electricity use from each product (TWh)

<sup>\*</sup> Denotes savings are from the Minimum Ambition Scenario. U4E COUNTRY ASSESSMENT, OCTOBER 2020 (UPDATE)

# **Country Data and Input Assumptions**



Population 16.9 Million Residential Electricity tariff 0.10 US\$ / kWh  GDP per capita 6,345 US\$  Electrification level 98.0% Transmission and distribution loss factor 12.9%	GENERAL INFORMATIO	N	ELECTRICITY MARKET	ELECTRICITY MARKET					
Electrification level 98.0% Transmission and 12.9%	Population	16.9 Million	Residential Electricity tariff	0.10 US\$ / kWh					
12.9%	GDP per capita 6,345 US\$								
	Electrification level	ectrification level 98.0%		12.00/					
0.75 kg / kWill	CO2 Emission Factor	0.73 kg / kWh	distribution loss factor	12.970					

		677 Ng / NVIII							
ASSUMPTIONS									
				_	(	1344 /	) =cc: :		_
		Unit En	ergy Co	onsumption (	kwn/yea	r) or Efficiency	/ Level		
	Product		Business As Usual		Minimum Ambition Scenario		High Ambition		Type of Product
							Scenar	rio	
P P		GSL	15W CFL	15	10W LED	10	7W LED	7	800 lumen light bulb: 1,000 hrs/year
Lighting		Linear	36W T8	108	20W LED	60	16W LED	48	4 foot tube: 3,000 hrs/year
Lig		HID	70W HPS	307	50W LED	219	40W LED	175	Poletop street light: 4,380hrs/year
ing		Residential Refrigerators	471 679		263 464		131 344		2-door refrigerator freezer of average size 270 liters
Cooling	<b>(3)</b>	Room Air Conditioners							A mix of 3.5 kW and 7 kW split units with a weighted-average cooling capacity of 4.5 kW
Equipment		Industrial Electric Motors (IEC level)	IEO	IEO		IE2			3-phase induction motors used in the industrial sector
Equip	7	Distribution Transformers (Model regulation level)	See note		Level 1		Level 2		Three-phase and single-phase liquid- filled and three-phase dry-type power distribution transformers

Distribution transformers Note: it is assumed that distribution transformers have losses in line with those assumed in the CENELEC harmonization research for the development of the EU standards.

#### **METHODOLOGY**

The analysis uses the UNEP-U4E's Country Savings Assessment Models to estimate the impacts of implementing policies that improve the energy efficiency of each product analysed. The savings potential in each scenario assumes Minimum Energy Performance Standards (MEPS) are introduced in 2020 at two different levels of ambition (minimum and high) as shown above.

#### **ASSUMPTIONS AND DATA SOURCES**

- Market size is based on data from industry partners, the UN COMTRADE database and market penetration forecasts generated by U4E Country Savings Assessment Models using data on population, climate, income and other macroeconomic indicators as detailed below.
- Population (2019 and future forecasts) comes from the UN Population Division.
- GDP per capita data (2018) comes from the World Bank with future growth forecasts derived from the IPCC's SSP3 scenario.
- Cooling Degree Days are based on average monthly temperatures from weatherbase.com, degreedays.net or given by wunderground.com.
- Current total electricity consumption comes from the World Bank and the US Energy Information Administration (EIA) with future forecasts derived from the International Energy Agency's (IEA) World Energy Outlook 2018.
- Residential electricity tariffs are based on IEA data.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- Electrification levels come from the IEA's Word Energy Outlook 2018 and the World Bank.
- CO2 emission factors come from the IEA and the Institute of Global Environmental Strategies (IGES) and are assumed constant in future years.
- Product typical characteristics are based on analysis from the UNEP-U4E Model Regulation Guidelines and other data from UNEP-U4E industry partners and technical experts including the US Lawrence Berkeley National Laboratory (LBNL), the International Copper Association (ICA) and GIZ.
- The approach of calculating the potential direct emissions saving of refrigerators and air conditioners is based on expert input from GIZ and LBNL.
- Additional to the above sources, a questionnaire was used to gather data from country officials.
- In a small number of instances, additional data was obtained from internet research or by using proxy data from similar markets.

Further details of the modelling approach and assumptions are available on the U4E website. For more information contact: U4E@un.org













