


# **COUNTRY SAVINGS ASSESSMENT**

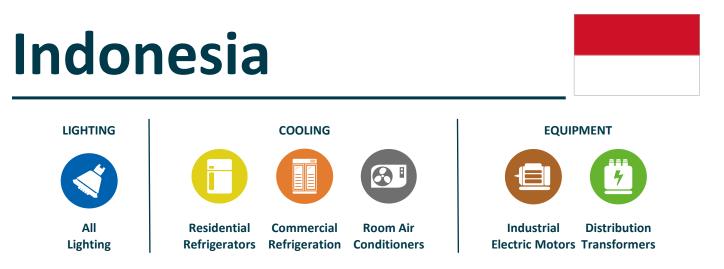

### INTRODUCTION

The Country Savings assessments provide a summary of the benefits attained from improved energy efficiency and climate friendly lighting, cooling appliances, and equipment. A market transformation can be obtained through measures such as Minimum Energy Performance Standards (MEPS); product labelling; market monitoring and verification; and financial incentives. For each product, the analysis considers three different scenarios:

- **Business As Usual**: Assumes that no actions are introduced and that the efficiency of products in the market continues to develop in line with historical trends in the absence of regulation.
- Minimum Ambition: In which MEPS are introduced in line with the basic requirements of the United Nations Environment Programme (UNEP) United for Efficiency (U4E) Model Regulation Guidelines.
- **High Ambition:** In which more ambitious actions are implemented in line with the highest levels proposed in the Model Regulation Guidelines.

More detailed breakdowns for lighting, cooling appliances and equipment can be found on the UNEP U4E <u>website</u>.

### **REPORT CONTENTS**

Page 1	Introduction
Page 2	Overview of benefits
Page 3	Higher ambition to help reach energy and climate goals
Page 4	Detailed benefits and typical product assumptions
Page 5	Savings potential in context
Page 6	Country data, product assumptions and methodology




Department for Environment Food & Rural Affairs









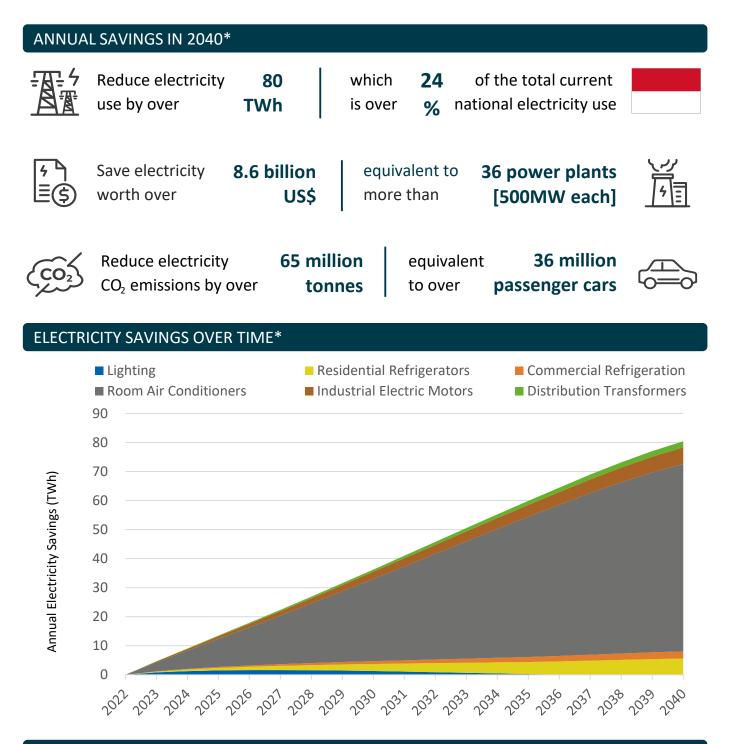

#### **OTHER BENEFITS ACHIEVED IN 2040\***



Reduced annual electricity subsidies by **1.8 billion US\$** 


Reduced cumulative direct GHG emissions by 54 million tonnes

\* Savings based on Minimum Ambition Scenario


### HIGHER AMBITION TO HELP REACH <sup>2</sup> ENERGY AND CLIMATE GOALS




#### THE MORE AMBITIOUS THE REGULATION, THE MORE SAVINGS ARE POSSIBLE

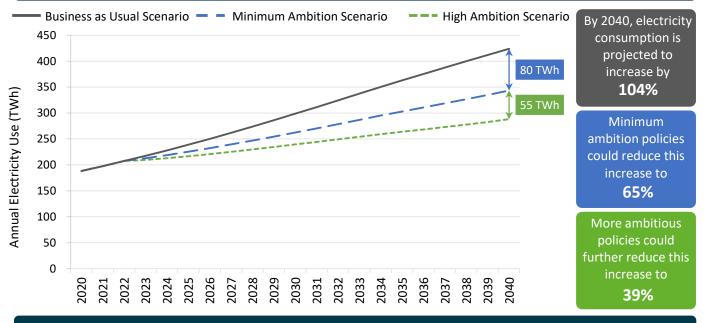


#### MEET GLOBAL CLIMATE GOALS BY SIGNIFICANTLY DECREASING EMISSIONS

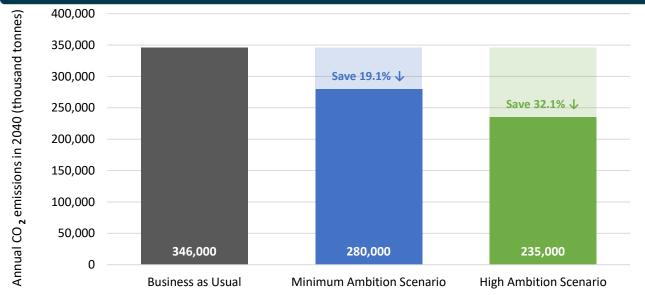

#### PRODUCT SHARE OF CO<sub>2</sub> EMISSIONS SAVINGS BY 2030 AND 2040\*



Share of 132.5 million tonnes of savings by 2030



Share of 635.8 million tonnes of savings by 2040

- Lighting
- Residential Refrigerators
- Commercial Refrigeration
- Room Air Conditioners
- Industrial Electric Motors
- Distribution Transformers

\* Savings based on Minimum Ambition Scenario

# DETAILED BENEFITS AND TYPICAL PRODUCT ASSUMPTIONS




#### ANNUAL SAVINGS IN 2030 AND 2040\*

	2030	2040	2030	2040	2030	2040
Cooling	Residential Refrigerators		Room Air Conditioners			
Electricity (GWh)	2,400	5,500	980	2,500	28,000	64,000
Electricity Bills (million US\$)	260	590	110	270	3,000	6,900
CO2 Emissions (thousand tonnes)	2,000	4,500	800	2,000	23,000	53,000
Lighting and Equipment	<b>(</b>	Lighting	Indus Moto	strial Electric ors	4	ribution sformers
Electricity (GWh)	1,300	45	2,500	5,700	770	2,100
Electricity Bills (million US\$)	140	4.8	260	610	83	230
CO2 Emissions (thousand tonnes)	1,100	37	2,000	4,700	630	1,700

#### CUMULATIVE SAVINGS BY 2030 AND 2040\*

	2030	2040	2030	2040	2030	2040
Cooling		dential igerators		nmercial rigeration		m Air ditioners
Electricity (TWh)	11	53	4.3	22	120	620
Electricity Bills (billion US\$)	1.1	5.7	0.5	2.4	13	66
CO2 Emissions (million tonnes)	8.6	43	3.5	18	100	500
Lighting and Equipment	C Light	ting	Indu	ustrial Electric tors	4	ribution sformers
Electricity (TWh)	11	15	11	54	3.3	18
Electricity Bills (billion US\$)	1.2	1.6	1.2	5.7	0.4	1.9
CO2 Emissions (million tonnes)	9.1	12	8.9	44	2.7	15

#### PRODUCT CONTRIBUTION TO CUMULATIVE ELECTRICITY USE & SAVINGS BY 2040

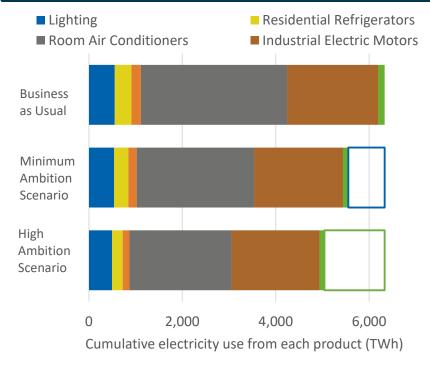

- Commercial Refrigeration
- Distribution Transformers

Savings share by 2040:						
	Minimum Ambition	High Ambition				
	2%	4%				
Ð	7%	10%				
	3%	4%				
$\textcircled{\begin{tabular}{ c c c c c c c c c c c c c c c c c c c$	79%	73%				
	7%	6%				
$\bigcirc$	2%	2%				

8,000

\* Savings based on Minimum Ambition Scenario

### **SAVINGS POTENTIAL IN CONTEXT**



#### OTHER OPPORTUNITIES COMPARED WITH MEPS BY 2040

Minimum Energy Performance Standards are developed specifically to improve product efficiency in a market, but other important steps can be taken reduce electricity consumption further.

ROOM AIR CONDITIONERS		Savings compared	
<ul> <li>Ensuring products are correctly sized at the time of instal</li> <li>Implementing best practice ongoing maintenance practice</li> <li>Raising the temperature set point for MEPS-compliant up can save between 6-10% per degree up to 27°C</li> </ul>	U4E MEPS, depending on stringency, will reduce national electricity use by Increasing the	20%- 30%	
<ul> <li>The use of control systems, sensors and thermal zoning. from AC controls varies greatly depending on the situatic savings can be:</li> </ul>	temperature set point saves		
<ul> <li>28-35% for small offices</li> <li>32-35% for small retail</li> <li>24% for supermarkets</li> </ul>	In suitable applications, controls can typically save	24%- 35%	
	Savings	Compared	
<ul> <li>Occupancy &amp; daylight sensors used in all appropriate settings can typically save up to:</li> <li>40% in commercial settings</li> <li>30% in industrial settings</li> </ul>	which, by 2040, could save up to: 3.6 TWh/y 1 TWh/y	U4E MEPS, in the minimum and high ambition scenarios, will reduce national electricity use by	3%- 10%
<ul> <li>Dimming controls at off-peak times can typically save as much as:</li> <li>25% for street lighting</li> </ul>	3 TWh/y	In suitable applications, controls can typically save	25%- 40%
INDUSTRIAL ELECTRIC MOTORS	Savings	Compared	
<ul> <li>The use of Variable Speed drives in all suitable applications could give an average saving of as much as:</li> <li>20% when used with pumps</li> <li>20% when used with fans/blowers</li> </ul>	which, by 2040, could save up to: 1 TWh/y 1.4 TWh/y	U4E MEPS, in the minimum and high ambition scenarios, will reduce national electricity use by	2.7%- 3.6%
<ul><li>10% when used with compressors</li><li>5% when used in mechanical applications</li></ul>	1.4 TWh/y 0.1 TWh/y	In suitable applications, VSDs can typically save	5%- 20%

#### DISTRIBUTION TRANSFORMERS SMART GRIDS

The main savings opportunities for distribution transformers come from management practices such as:

- Ensuring transformers are correctly sized at the time of installation
- Implementing best practice ongoing maintenance and rewinding methods

Using Smart Grids brings other benefits including:

- Reducing projected increases in peak demand by as much as 24%, allowing:
  - reduced capacity overall
  - delays in maintenance/replacement requirements
  - reduced CO<sub>2</sub> emissions from peaking plant
- Allowing improved integration of distributed and renewable generation, and more electric cars both with associated CO<sub>2</sub> emissions benefits

## COUNTRY DATA, TYPICAL PRODUCT ASSUMPTIONS AND METHODOLOGY



GENERAL INFORMATION		ELECTRICITY MARKET			
Population	276 Million	Residential electricity tariff	0.11 US\$/kWh		
GDP per capita	4,055 US\$				
Electrification level	99.7%	Transmission and	9.4%		
CO <sub>2</sub> emission factor 0.74 kg/kWh		distribution loss factor	9.4%		

#### TYPICAL PRODUCT ASSUMPTIONS

	2022 Unit Energy Consumption (kWh/year) or Efficiency Level						
Product		Business Minimum As Usual Ambition Scenario		High Ambition Scenario	Type of Product		
Lighting		GSL Linear HID	15W CFL 15 36W T8 108 70W HPS 307	10W LED 10 20W LED 60 50W LED 219	7W LED 7 16W LED 48 40W LED 175	800 lumen bulb: 1,000 hrs/year 4 foot tube: 3,000 hrs/year Poletop street light: 4,380hrs/year	
		Residential Refrigerators	319	240	120	2-door refrigerator freezer of average size 205 liters	
Cooling		Commercial Refrigeration	4,699	3,866	2,793	A market-weighted average of retail display cabinets (both remote and integral), drinks cabinets, storage cabinets, ice-cream freezers, vending machines and scooping cabinets.	
		Room Air Conditioners	3,002	1,939	1,474	A mix of 3.5 kW and 7 kW split units with a weighted-average cooling capacity of 3.7 kW	
Equipment		Industrial Electric Motors (IEC level)	IEO	IE2	IE3	3-phase induction motors used in the industrial sector	
		Distribution Transformers (Model regulation level)	See note	Level 1	Level 2	Three-phase and single-phase liquid-filled and three-phase dry-type power distribution transformers	

Distribution transformers Note: it is assumed that distribution transformers have losses in line with those assumed in the CENELEC harmonization research for the development of the EU standards.

#### METHODOLOGY

The analysis uses the UNEP-U4E's Country Savings Assessment Models to estimate the impacts of implementing policies that improve the energy efficiency of each product analysed. The brief methodology is provided below (contact U4E for more information):

• The cooling analyses for refrigerators, commercial refrigeration and air conditioners use a bottom-up stock model approach combined with market data on typical product performance. Future growth is projected based on established relationships between ownership and other known macroeconomic indicators.

• The lighting analysis uses a bottom-up stock model with market data on typical products to estimate current light demand. This is projected forwards in line with IEA estimates of future buildings electricity use. It is then used with an estimate of future average efficacy to calculate electricity consumption. This efficacy is based on assumptions about future trends in lamp switching and product efficacy in different scenarios.

• The equipment models are both top-down estimates. The electricity use of motors is based on its typical relationship to industrial GDP, while distribution transformers are based on the typical capacity required for a total national electricity demand. Electricity use is shared between several typical products and applications based on market data. In both cases, the improvement in average stock efficiency is based on end-of-life stock turnover and new sales.

The savings potential in each scenario assumes Minimum Energy Performance Standards (MEPS) are introduced in 2022 at two different levels of ambition (minimum and high) as shown in the Typical Product Assumptions table above.

Further details of the modelling approach and assumptions are available on the <u>U4E website</u>. For more information contact: unep-u4e@un.org