


# Gambia





Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

ANNUAL SAVIN	IGS IN 2030	
	Reduce electricity use	
•	→ by over <b>55 GWh</b>	
	→ 8.6% of future national electricity use	
ààà	Save electricity worth 10 Million USD	
	equivalent to 1 Power Plants [20MW]	
CO <sub>2</sub>	Reduce CO <sub>2</sub> emissions by <b>30 Thousand Tonn</b>	ies
	equivalent to 20 Thousand Passenger Cars	

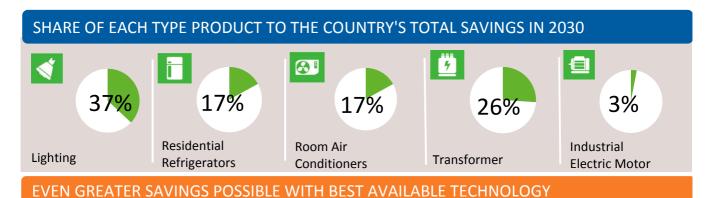

# Business As Usual Case (BAU Scenario) Best Current Global Minimum Energy Performance Standards (Policy Scenario) Current Best Available Technology (BAT Scenario) 270 270 220 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030

Energy Consumption (GWh)

# THE PATHWAY TO ENERGY EFFICIENCY





ANNUAL SAVINGS IN 2025 AND 2030											
		Lighting		Residential Roo		m Air tioners		Industrial			
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
	Electricity (GWh)	17.4	20.6	4.6	9.4	4.3	9.4	6.9	14.4	0.7	1.5
ååå	Electricity Bills (thousand US\$)	3,707.1	4,378.2	985.6	2,010.7	920.6	1,994.9	1,475.1	3,065.9	197.9	429.8
CO <sub>2</sub>	CO2 Emissions (thousand tonnes)	9.4	11.1	2.5	5.1	2.3	5.1	3.4	7.1	0.4	0.8

CUMULATIVE SAVINGS (2020 - 2030)							
		<b>4</b>	Residential	Room Air	7	Industrial	
		Lighting	Refrigerators	Conditioners	Transformers	Electric Motors	
0	Electricity (GWh)	159.2	51.3	49.3	79.7	7.8	
ååå	Electricity Bills (million US\$)	33.9	10.9	10.5	17.0	2.3	
CO2	CO2 Emissions (thousand tonnes)	85.9	27.7	26.6	39.0	4.2	
OTHER BENEFITS IN 2030							
*	Direct GHG emission	ons reduce	ed bv →	15 Thous	sand Tonnes		

*	Direct GHG emissions reduced by	<b>→</b>	15 Thousand Tonnes
	Increased grid connection to	<b>→</b>	28 Thousand Households

## ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): A 44% emissions cut by 2025, compared to business as usual projections, and a 45% cut by 2030.

# **Country Specific Data and Input Assumptions**

# For Gambia

**ASSUMPTIONS** 



GENERAL INFORMATION	
Population	1.9 million
GDP per capita	423 US\$
Electrification level	35%
CO2 Emission Factor	0.49 kg / kWh

ELECTRICITY MARKET	
Residential Electricity tariff	0.213 US\$ / kWh
Industrial Electricity tariff	0.290 US\$ / kWh
Transmission and	9.18%
distribution loss factor	

Product		Unit Energy Co	onsumption (kWh/yea	T ( D l l	
		BAU Policy Scenario BAT		Type of Product	
∢	Lighting	65.7	15.3	8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED
	Residential Refrigerators	325	191	134	2-door top-mount Average size 225 liters
	Room Air Conditioners	3 252	2,653	1,738	Split unit with 3.5 kW cooling capacity
<u><u> 7</u></u>	Transformers	N/A	SEAD Tier3	SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power and distribution transformers
	Industrial Electric Motors	IE1/IE0	IE3	IE4	3-phase induction motors Ranging from:

### **METHODOLOGY**

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

### ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.

















0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW