


# **Burkina Faso**




Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

### ANNUAL SAVINGS IN 2030

*	Reduce electricity use → by over <b>296 GWh</b>	
	→ 10.3% of future national electricity use	
ààà	Save electricity worth 60 Million USD	
	equivalent to <b>3 Power Plants [20MW]</b>	
C0 <sub>2</sub>	Reduce CO <sub>2</sub> emissions by <b>160 Thousand Ton</b>	ines
	equivalent to 90 Thousand Passenger Cars	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~

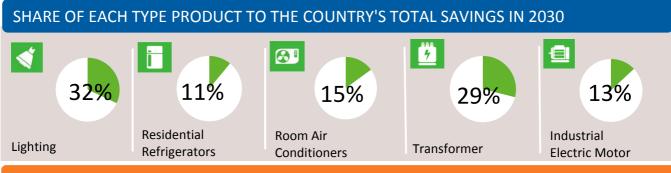

EVEN GREATER SAVINGS POSSIBLE WITH BEST AVAILABLE TECHNOLOGY

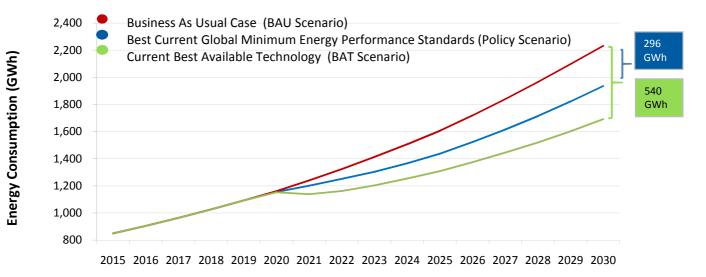

## THE PATHWAY TO ENERGY EFFICIENCY



ANNUAL SAVINGS IN 2025 AND 2030

		Lighting			ential erators	Room Air Conditioners		<b>Transformers</b>		Industrial Electric Motors	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
	Electricity (GWh)	79.8	94.5	13.8	32.9	18.0	43.7	41.6	86.4	16.3	38.3
ففف	Electricity Bills (million US\$)	17.6	20.8	3.0	7.2	4.0	9.6	9.2	19.0	0.7	1.5
CO2	CO2 Emissions (thousand tonnes)	45.2	53.5	7.8	18.6	10.2	24.7	20.4	42.3	9.2	21.7

CUMULATIVE SAVINGS (2020 - 2030)									
		1	Ī	<b>S</b> <sup>1</sup>	<u>7</u>				
		Lighting	Residential Refrigerators	Room Air Conditioners	Transformers	Industrial Electric Motors			
	Electricity (GWh)	730.6	163.8	216.0	478.3	191.8			
ففف	Electricity Bills (million US\$)	160.7	36.0	47.5	105.2	7.7			
CO <sub>2</sub>	CO2 Emissions (thousand tonnes)	413.5	92.7	122.3	234.4	108.6			

	OTHER BENEFITS IN 2030						
	*	Direct GHG emissions reduced by	→	85 Thousand Tonnes			
_		Increased grid connection to	<b>→</b>	148 Thousand Households			

### ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): An unconditional pledge to reduce emissions by 6.6% below business-as-usual levels by 2030, with a further 11.6% reduction conditional upon international support.

## **Country Specific Data and Input** Assumptions





GENERAL INFORMATION				RICITY MARKET		
Population	17.4 million		Residential Electricity tariff		0.220 US\$ / kWh	
GDP per capita	720 US\$		Industrial Electricity tariff		0.040 US\$ / kWh	
Electrification level	16%		Transmission and		13.43%	
CO2 Emission Factor	0.49 kg / kWh		distribution loss factor			
ASSUMPTIONS						
Product	Unit Energy Co	onsumption (	kWh/yea	Type of Product		
	BAU	Policy Sce	enario	BAT		
Lighting	65.7	15.3		8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED	
Residential Refrigerators	325	191		134	2-door top-mount Average size 225 liters	
Room Air Conditioners	3 252	2,65	3	1,738	Split unit with 3.5 kW cooling capacity	
Transformers	N/A	SEAD T	ier3	SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power and distribution transformers	
Industrial Electric Motors	IE1/IE0	IE3		IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW	

#### METHODOLOGY

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

#### ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- E Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life amining in the DAL company of the base block and end of life amining and the base block and the base block and end of life amining and the base block and the base block
- life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.









