


India




Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

ANNUAL SAVIN	IGS IN 2030
	Reduce electricity use
	→ by over 175 TWh
	→ 8.5% of future national electricity use
ààà	Save electricity worth 10 Billion USD
	equivalent to 80 Power Plants [500MW]
CO ₂	Reduce CO ₂ emissions by 200 Million Tonnes
	equivalent to 110 Million Passenger Cars

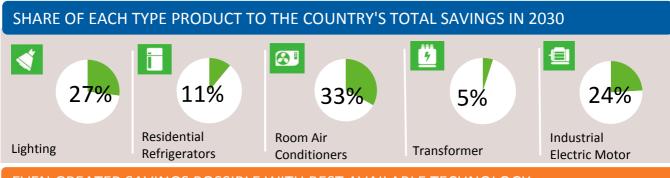

EVEN GREATER SAVINGS POSSIBLE WITH BEST AVAILABLE TECHNOLOGY

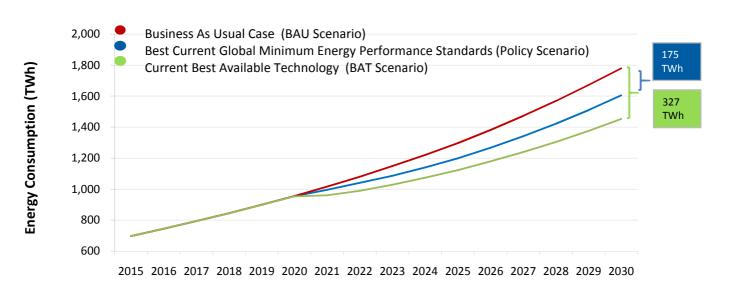

THE PATHWAY TO ENERGY EFFICIENCY





ANNUAL SAVINGS IN 2025 AND 2030											
		Ligh	ating		ential erators	Rooi Condit			ormers	Indu:	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
•	Electricity (TWh)	43.2	46.6	8.8	19.5	24.2	57.4	4.4	9.0	17.7	42.5
ååå	Electricity Bills (billion US\$)	2.5	2.7	0.5	1.2	1.4	3.4	0.3	0.5	1.9	4.7
CO2	CO2 Emissions (million tonnes)	48.7	52.5	10.0	22.0	27.3	64.7	4.0	8.1	20.0	48.0

CUMULATIVE SAVINGS (2020 - 2030)							
		4	Residential	Room Air	<u> </u>	Industrial	
		Lighting	Refrigerators	Conditioners	Transformers	Electric Motors	
	Electricity (TWh)	381.0	101.6	287.3	50.7	210.4	
ååå	Electricity Bills (billion US\$)	22.5	6.0	17.0	3.0	23.1	
CO2	CO2 Emissions (million tonnes)	429.6	114.5	323.9	45.8	237.2	

OTHER BENEFITS IN 2030							
*	Direct GHG emissions reduced by	\rightarrow	51 Million Tonnes				
	Increased grid connection to	→	87 Million Households				
ààà	Reduced electricity subsidies by	→	1 Billion USD				
	Reduced emissions by → SO2	845 Tho Tonnes	NOx Tonnes				

ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): A 33-35% reduction in emissions intensity by 2030, compared to 2005 levels. Also pledges to achieve 40% of cumulative electricity installed capacity from non-fossil fuel based resources by 2030.

Country Specific Data and Input Assumptions

For India



GENERAL INFORMATION	
Population	1267.4 million
GDP per capita	1,631 US\$
Electrification level	75%
CO2 Emission Factor	0.904 kg / kWh

ELECTRICITY MARKET	
Residential Electricity tariff	0.059 US\$ / kWh
Industrial Electricity tariff	0.110 US\$ / kWh
Transmission and	19.83%
distribution loss factor	

ASSUMPTIONS

Product		Unit Energy Co	onsumption (kWh/yea	Type of Product	
		BAU	BAU Policy Scenario BAT		Type of Froduct
4	Lighting	65.7	15.3	8.8	Low incandescent Lamp,3h/day; 14W CFL; 8W LED
	Residential Refrigerators	352	207	159	2-door top-mount Average size 280 liters
	Room Air Conditioners	2.607	1,990	1,304	Split unit with 3.5 kW cooling capacity
<u>#</u>	Transformers	N/A	SEAD Tier3	SEAD Tier5	three-phase and single-phase liquid- filled and three-phase dry-type power and distribution transformers
	Industrial Electric Motors	IE1/IE0	IE3	IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW;75 - 375 kW

METHODOLOGY

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.















