



Vanuatu



Energy efficiency benefits from lighting, residential refrigerators, room air conditioners, power and distribution transformers and industrial electric motors with the implementation of globally benchmarked minimum energy performance standards.

ANNUAL SAVINGS IN 2030



Reduce electricity use

→ by over **8 GWh**

→ **9.6%** of future national electricity use



Save electricity worth **3 Million USD**

equivalent to **1 Power Plants [20MW]**



Reduce CO₂ emissions by **5 Thousand Tonnes**

equivalent to **3 Thousand Passenger Cars**



SHARE OF EACH TYPE PRODUCT TO THE COUNTRY'S TOTAL SAVINGS IN 2030



24%

Lighting



38%

Residential
Refrigerators



3%

Room Air
Conditioners



28%


Transformer



7%

Industrial
Electric Motor

EVEN GREATER SAVINGS POSSIBLE WITH BEST AVAILABLE TECHNOLOGY

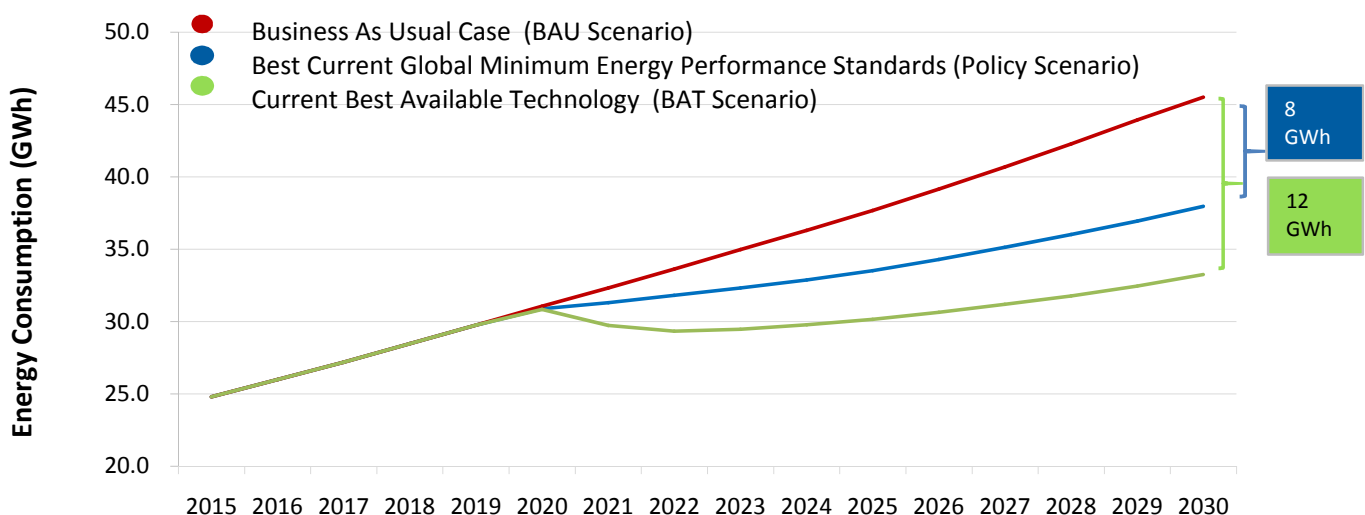

THE PATHWAY TO ENERGY EFFICIENCY



ANNUAL SAVINGS IN 2025 AND 2030

		Lighting		Residential Refrigerators		Room Air Conditioners		Transformers		Industrial Electric Motors	
		2025	2030	2025	2030	2025	2030	2025	2030	2025	2030
	Electricity (GWh)	1.6	1.8	1.2	2.9	0.1	0.2	1.1	2.1	0.2	0.5
	Electricity Bills (thousand US\$)	687.9	807.6	507.8	1,270.1	31.0	75.6	492.1	933.1	41.2	89.1
	CO2 Emissions (tonnes)	996.5	1,169.8	735.6	1,839.8	44.9	109.5	571.5	1,083.7	154.6	334.1

CUMULATIVE SAVINGS (2020 - 2030)

		Lighting		Residential Refrigerators		Room Air Conditioners		Transformers		Industrial Electric Motors	
	Electricity (GWh)	14.4		14.0		0.8		12.4		2.8	
	Electricity Bills (million US\$)	6.3		6.2		0.4		5.5		0.5	
	CO2 Emissions (thousand tonnes)	9.2		8.9		0.5		6.4		1.8	

OTHER BENEFITS IN 2030



Increased grid connection to



4 Thousand Households

ENERGY EFFICIENCY STRATEGY AND NATIONALLY DETERMINED CONTRIBUTION

Country Nationally Determined Contribution (NDC): Moving to 65% renewable energy use by 2020 and nearly 100% renewable electricity by 2030, reducing energy emissions by 30% in 2030 compared to business as usual.

Country Specific Data and Input Assumptions For Vanuatu



GENERAL INFORMATION		ELECTRICITY MARKET	
Population	0.3 million	Residential Electricity tariff	0.440 US\$ / kWh
GDP per capita	2,891 US\$	Industrial Electricity tariff	0.170 US\$ / kWh
Electrification level	27%	Transmission and distribution loss factor	19.83%
CO2 Emission Factor	0.511 kg / kWh		

ASSUMPTIONS

Product	Unit Energy Consumption (kWh/year) or Efficiency Level			Type of Product
	BAU	Policy Scenario	BAT	
 Lighting	65.7	15.3	8.8	Low incandescent Lamp, 3h/day; 14W CFL; 8W LED
 Residential Refrigerators	410	224	156	2-door top-mount Average size 325 liters
 Room Air Conditioners	1,444	884	579	Split unit with 3.5 kW cooling capacity
 Transformers	N/A	SEAD Tier3	SEAD Tier5	three-phase and single-phase liquid-filled and three-phase dry-type power and distribution transformer
 Industrial Electric Motors	IE1/IE0	IE3	IE4	3-phase induction motors Ranging from: 0.75 - 7.5 kW; 7.5 - 75 kW; 75 - 375 kW

METHODOLOGY

The analysis uses CLASP's and Lawrence Berkeley National Laboratory's Policy Analysis Modeling System (PAMS) to forecast the impacts from implementing policies that improve the energy efficiency of new household air conditioners and refrigerators. For lighting, electric motors, and power and distribution transformers individual - models were developed, taking into account country level data, expected GDP growth, and industrialization levels. The savings potential assumes minimum energy performance standards (MEPS) are implemented in 2020 at level equivalent to the present day (2015) best global MEPS that are currently implemented. The graph on page two also shows the savings potential that is possible with the implementation of MEPS in 2020 at level equivalent to the present day best available technology (BAT).

ASSUMPTIONS AND DATA SOURCES

- Population and GDP per capita data (2014) comes from the World Bank.
- Electrification levels come from the International Energy Agency (IEA).
- Market size was determined by data provided by industry partners; UN Comtrade database; household penetration forecasts generated by PAMS from population, climate, and macroeconomic indicators.
- Future electricity consumption was calculated using current consumption figures provided by the IEA and the U.S. Energy Information Administration (EIA).
- Baseline price, unit energy consumption (UEC), appliance lifetime were provided by country representatives (when available); industry partners; and Lawrence Berkeley National Laboratory. The business-as-usual scenario assumes a 1 per cent annual improvement in UEC.
- Electricity tariffs were provided by the IEA; and Internet research.
- Transmission and distribution loss factor is a regional average calculated from electricity production and consumption data published by the IEA.
- CO2 emission factor came from the IEA and extrapolations were made for countries lacking data.
- Consumer discount rate was derived from the Human Development Index, United Nations Development Programme (2012).
- The approach of calculating the potential direct emission saving of refrigerators and air conditioners: the typical current mix of refrigerants fillings, leakage rates and end of life emissions in the BAU compared to the best alternative with natural refrigerants (mostly R290 for splits and R600a for domestic refrigerators).
- Additional to the above sources, a questionnaire was used to gather data from country officials.

