


COUNTRY SAVINGS ASSESSMENT

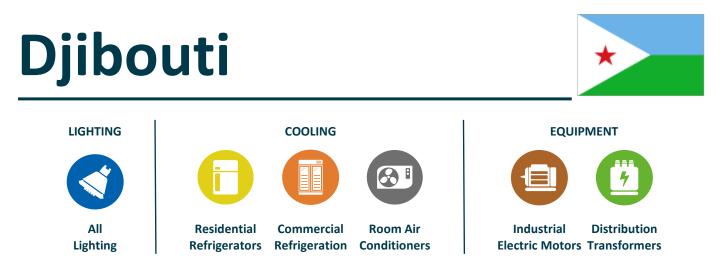

INTRODUCTION

The Country Savings assessments provide a summary of the benefits attained from improved energy efficiency and climate friendly lighting, cooling appliances, and equipment. A market transformation can be obtained through measures such as Minimum Energy Performance Standards (MEPS); product labelling; market monitoring and verification; and financial incentives. For each product, the analysis considers three different scenarios:

- **Business As Usual**: Assumes that no actions are introduced and that the efficiency of products in the market continues to develop in line with historical trends in the absence of regulation.
- Minimum Ambition: In which MEPS are introduced in line with the basic requirements of the United Nations Environment Programme (UNEP) United for Efficiency (U4E) Model Regulation Guidelines.
- **High Ambition:** In which more ambitious actions are implemented in line with the highest levels proposed in the Model Regulation Guidelines.

More detailed breakdowns for lighting, cooling appliances and equipment can be found on the UNEP U4E <u>website</u>.

REPORT CONTENTS

Page 1	Introduction
Page 2	Overview of benefits
Page 3	Higher ambition to help reach energy and climate goals
Page 4	Detailed benefits and typical product assumptions
Page 5	Savings potential in context
Page 6	Country data, product assumptions and methodology




Department for Environment Food & Rural Affairs





OVERVIEW OF BENEFITS



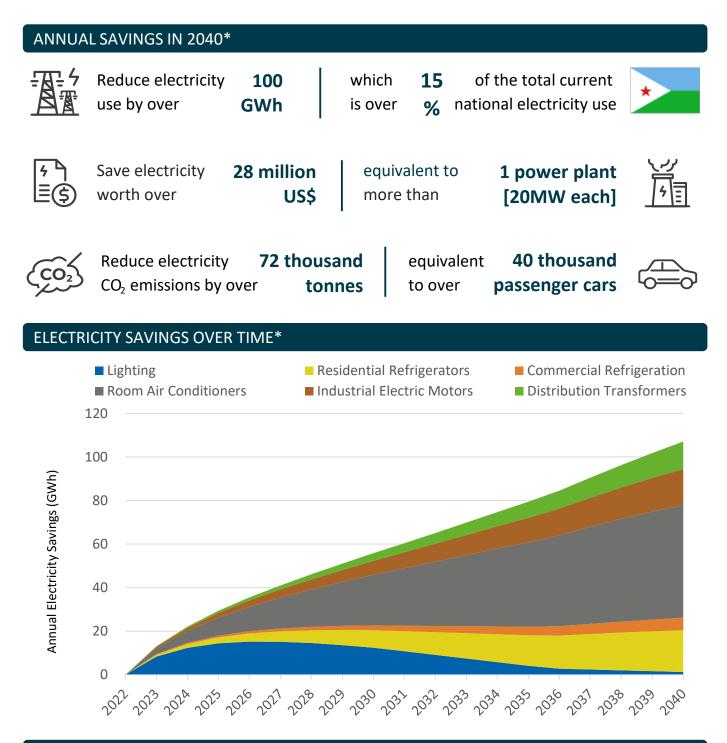

OTHER BENEFITS ACHIEVED IN 2040*



Increased grid connection to 54 thousand households


Reduced cumulative direct GHG emissions by 80 thousand tonnes

* Savings based on Minimum Ambition Scenario


HIGHER AMBITION TO HELP REACH ⁷ ENERGY AND CLIMATE GOALS




THE MORE AMBITIOUS THE REGULATION, THE MORE SAVINGS ARE POSSIBLE

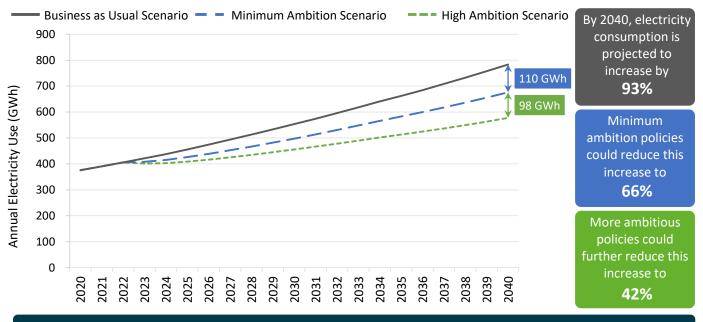


MEET GLOBAL CLIMATE GOALS BY SIGNIFICANTLY DECREASING EMISSIONS

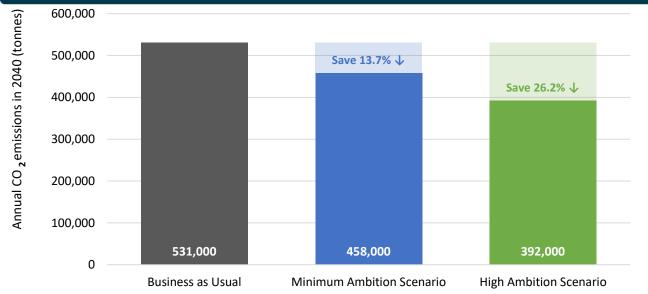

PRODUCT SHARE OF CO₂ EMISSIONS SAVINGS BY 2030 AND 2040*



Share of 199.5 thousand tonnes of savings by 2030



Share of 762.1 thousand tonnes of savings by 2040

- Lighting
- Residential Refrigerators
- Commercial Refrigeration
- Room Air Conditioners
- Industrial Electric Motors
- Distribution Transformers

* Savings based on Minimum Ambition Scenario


DETAILED BENEFITS AND TYPICAL PRODUCT ASSUMPTIONS




ANNUAL SAVINGS IN 2030 AND 2040*

	2030	2040	2030	2040	2030	2040
Cooling	Residential Refrigerators		Commercial Refrigeration		Room Air Conditioners	
Electricity (GWh)	8.0	19	2.2	5.8	23	52
Electricity Bills (thousand US\$)	2,100	5,000	580	1,500	6,100	13,000
CO2 Emissions (tonnes)	5,500	13,000	1,500	3,900	16,000	35,000
Lighting and Equipment	(ighting	Indus Moto	strial Electric ors	4	ribution sformers
Electricity (GWh)	12	1.3	6.4	17	3.5	13
Electricity Bills (thousand US\$)	3,200	330	1,700	4,400	920	3,300
CO2 Emissions (tonnes)	8,400	860	4,300	11,000	2,400	8,600

CUMULATIVE SAVINGS BY 2030 AND 2040*

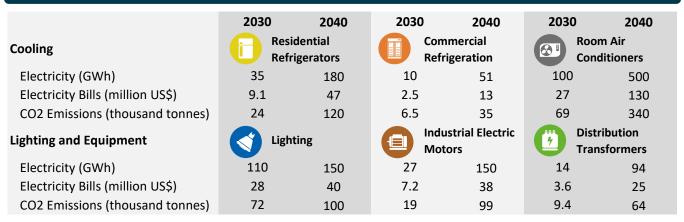

PRODUCT CONTRIBUTION TO CUMULATIVE ELECTRICITY USE & SAVINGS BY 2040

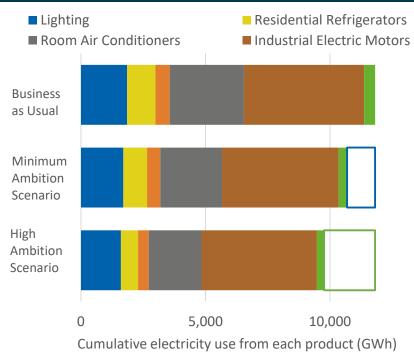

- Commercial Refrigeration
- Distribution Transformers

Savings share by 2040:					
	Minimum Ambition	High Ambition			
	14%	12%			
\bigcirc	16%	22%			
	5%	7%			
	44%	42%			
(13%	9%			
Ø	8%	7%			

15,000

* Savings based on Minimum Ambition Scenario

SAVINGS POTENTIAL IN CONTEXT



OTHER OPPORTUNITIES COMPARED WITH MEPS BY 2040

Minimum Energy Performance Standards are developed specifically to improve product efficiency in a market, but other important steps can be taken reduce electricity consumption further.

ROOM AIR CONDITIONERS	Savings compared		
 Ensuring products are correctly sized at the time of instal Implementing best practice ongoing maintenance practic Raising the temperature set point for MEPS-compliant uncan save between 6-10% per degree up to 27°C The use of control systems, sensors and thermal zoning. from AC controls varies greatly depending on the situation 	U4E MEPS, depending on stringency, 17% will reduce national 299 electricity use by Increasing the 6%- temperature set		
savings can be: • 28-35% for small offices	point saves 10%/°C		
 28-35% for small offices 32-35% for small retail 24% for supermarkets 	applications, controls can typically save		
	Savings	Compared	
 Occupancy & daylight sensors used in all appropriate settings can typically save up to: 40% in commercial settings 30% in industrial settings Dimming controls at off-peak times can typically save 	which, by 2040, could save up to: 17 GWh/y 4.5 GWh/y	U4E MEPS, in the minimum and high ambition scenarios, will reduce national electricity use by	8%- 13%
 as much as: 25% for street lighting 	6 GWh/y	In suitable applications, controls can typically save	25%- 40%
INDUSTRIAL ELECTRIC MOTORS	Savings	Compared	
 The use of Variable Speed drives in all suitable applications could give an average saving of as much as: 20% when used with pumps 20% when used with fans/blowers 	which, by 2040, could save up to: 2.8 GWh/y 3.7 GWh/y	U4E MEPS, in the minimum and high ambition scenarios, will reduce national electricity use by	3%-4%
10% when used with compressors5% when used in mechanical applications	3.8 GWh/y 0.3 GWh/y	In suitable applications, VSDs can typically save	5%- 20%

DISTRIBUTION TRANSFORMERS SMART GRIDS

The main savings opportunities for distribution transformers come from management practices such as:

- Ensuring transformers are correctly sized at the time of installation
- Implementing best practice ongoing maintenance and rewinding methods

Using Smart Grids brings other benefits including:

- Reducing projected increases in peak demand by as much as 24%, allowing:
 - reduced capacity overall
 - delays in maintenance/replacement requirements
 - reduced CO₂ emissions from peaking plant
- Allowing improved integration of distributed and renewable generation, and more electric cars both with associated CO₂ emissions benefits

COUNTRY DATA, TYPICAL PRODUCT ASSUMPTIONS AND METHODOLOGY



GENERAL INFORMATION		ELECTRICITY MARKET	ELECTRICITY MARKET		
Population 1 Million		Residential electricity tariff	0.26 US\$/kWh		
GDP per capita	3,577 US\$				
Electrification level	64.9%	Transmission and	9.2%		
CO ₂ emission factor 0.62 kg/kWh		distribution loss factor	9.2%		

TYPICAL PRODUCT ASSUMPTIONS

	2022 Unit Energy Consumption (kWh/year) or Efficiency Level					
Product		Business As Usual	Minimum Ambition Scenario	High Ambition Scenario	Type of Product	
Lighting		GSL Linear HID	15W CFL 15 36W T8 108 70W HPS 307	10W LED 10 20W LED 60 50W LED 219	7W LED 7 16W LED 48 40W LED 175	800 lumen bulb: 1,000 hrs/year 4 foot tube: 3,000 hrs/year Poletop street light: 4,380hrs/year
		Residential Refrigerators	330	247	123	2-door refrigerator freezer of average size 210 liters
Cooling		Commercial Refrigeration	3,978	3,552	2,662	A market-weighted average of retail display cabinets (both remote and integral), drinks cabinets, storage cabinets, ice-cream freezers, vending machines and scooping cabinets.
		Room Air Conditioners	3,500	2,406	1,776	A mix of 3.5 kW and 7 kW split units with a weighted-average cooling capacity of 5 kW
Equipment		Industrial Electric Motors (IEC level)	IEO	IE2	IE3	3-phase induction motors used in the industrial sector
		Distribution Transformers (Model regulation level)	See note	Level 1	Level 2	Three-phase and single-phase liquid-filled and three-phase dry-type power distribution transformers

Distribution transformers Note: BAU assumes that 10% of the market is influenced by the most recent technical specifications for all liquid-filled types in Mozambique and Rwanda and drytypes in Mozambique.

METHODOLOGY

The analysis uses the UNEP-U4E's Country Savings Assessment Models to estimate the impacts of implementing policies that improve the energy efficiency of each product analysed. The brief methodology is provided below (contact U4E for more information):

• The cooling analyses for refrigerators, commercial refrigeration and air conditioners use a bottom-up stock model approach combined with market data on typical product performance. Future growth is projected based on established relationships between ownership and other known macroeconomic indicators.

• The lighting analysis uses a bottom-up stock model with market data on typical products to estimate current light demand. This is projected forwards in line with IEA estimates of future buildings electricity use. It is then used with an estimate of future average efficacy to calculate electricity consumption. This efficacy is based on assumptions about future trends in lamp switching and product efficacy in different scenarios.

• The equipment models are both top-down estimates. The electricity use of motors is based on its typical relationship to industrial GDP, while distribution transformers are based on the typical capacity required for a total national electricity demand. Electricity use is shared between several typical products and applications based on market data. In both cases, the improvement in average stock efficiency is based on end-of-life stock turnover and new sales.

The savings potential in each scenario assumes Minimum Energy Performance Standards (MEPS) are introduced in 2022 at two different levels of ambition (minimum and high) as shown in the Typical Product Assumptions table above.

Further details of the modelling approach and assumptions are available on the <u>U4E website</u>. For more information contact: unep-u4e@un.org