

# **Trinidad and Tobago**





## INTRODUCTION

The Country Savings assessments provide a summary of the benefits attained from improved energy efficiency and climate friendly lighting, cooling appliances, and equipment. A market transformation can be obtained through measures such as Minimum Energy Performance Standards (MEPS); product labelling; market monitoring and verification; and financial incentives. For each product, the analysis considers three different scenarios:

- **Business As Usual**: Assumes that no actions are introduced and that the efficiency of products in the market continues to develop in line with historical trends in the absence of regulation.
- Minimum Ambition: In which MEPS are introduced in line with the basic requirements of the United Nations Environment Programme (UNEP) United for Efficiency (U4E) Model Regulation Guidelines.
- **High Ambition:** In which more ambitious actions are implemented in line with the highest levels proposed in the Model Regulation Guidelines.

More detailed breakdowns for lighting, cooling appliances and equipment can be found on the UNEP U4E <u>website</u>.

## **REPORT CONTENTS**

Page 1	Introduction
Page 2	Overview of benefits
Page 3	Higher ambition to help reach energy and climate goals
Page 4	Detailed benefits and typical product assumptions
Page 5	Savings potential in context
Page 6	Country data, product assumptions and methodology




Department for Environment Food & Rural Affairs









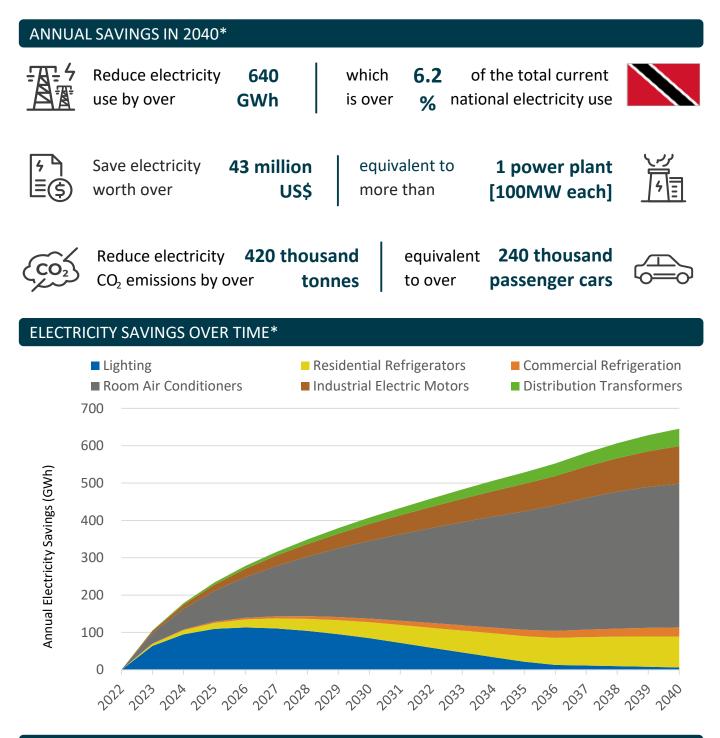

#### **OTHER BENEFITS ACHIEVED IN 2040\***



Reduced annual electricity subsidies by **21 million US\$** 


Reduced cumulative direct GHG emissions by 590 thousand tonnes

\* Savings based on Minimum Ambition Scenario


## HIGHER AMBITION TO HELP REACH ENERGY AND CLIMATE GOALS




## THE MORE AMBITIOUS THE REGULATION, THE MORE SAVINGS ARE POSSIBLE

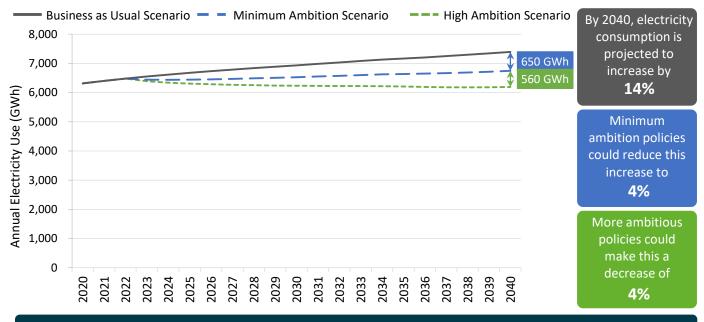


#### MEET GLOBAL CLIMATE GOALS BY SIGNIFICANTLY DECREASING EMISSIONS

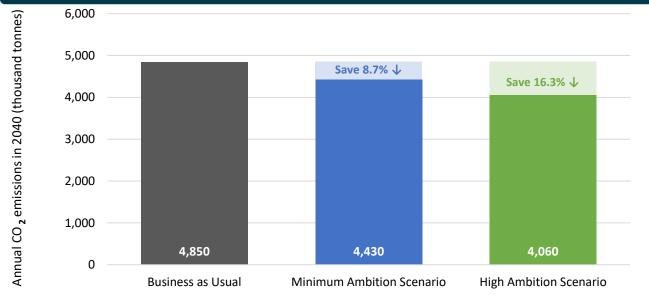

#### PRODUCT SHARE OF CO<sub>2</sub> EMISSIONS SAVINGS BY 2030 AND 2040\*





Share of 5 million tonnes of savings by 2040

- Lighting
- Residential Refrigerators
- Commercial Refrigeration
- Room Air Conditioners
- Industrial Electric Motors
- Distribution Transformers

\* Savings based on Minimum Ambition Scenario

# DETAILED BENEFITS AND TYPICAL PRODUCT ASSUMPTIONS




#### ANNUAL SAVINGS IN 2030 AND 2040\*

	2030	2040	2030	2040	2030	2040
Cooling		Residential Refrigerators		mercial igeration		m Air ditioners
Electricity (GWh)	43	83	10	25	210	380
Electricity Bills (thousand US\$)	2,800	5,500	660	1,600	14,000	25,000
CO2 Emissions (thousand tonnes)	28	54	6.5	16	140	250
Lighting and Equipment		Lighting	Indu Mote	strial Electric ors	4	ribution Isformers
Electricity (GWh)	85	6.3	45	100	17	47
Electricity Bills (thousand US\$)	5,600	410	3,000	6,600	1,100	3,100
CO2 Emissions (thousand tonnes)	56	4.1	30	66	11	31

#### CUMULATIVE SAVINGS BY 2030 AND 2040\*



#### PRODUCT CONTRIBUTION TO CUMULATIVE ELECTRICITY USE & SAVINGS BY 2040

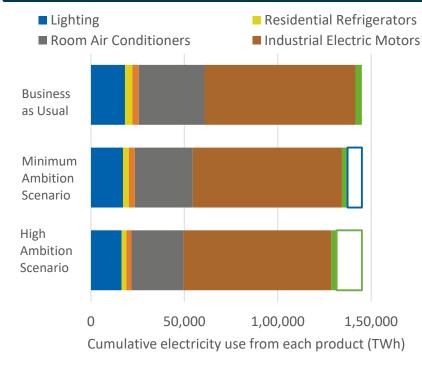

- Commercial Refrigeration
- Distribution Transformers

Savings share by 2040:					
	Minimum	High			
	Ambition	Ambition			
	14%	14%			
$\bigcirc$	11%	11%			
	3%	5%			
(ST	54%	54%			
<b>(</b>	13%	12%			
Ø	5%	5%			

2,00,000

\* Savings based on Minimum Ambition Scenario

## **SAVINGS POTENTIAL IN CONTEXT**



#### OTHER OPPORTUNITIES COMPARED WITH MEPS BY 2040

Minimum Energy Performance Standards are developed specifically to improve product efficiency in a market, but other important steps can be taken reduce electricity consumption further.

ROOM AIR CONDITIONERS	Savings compared		
<ul> <li>Ensuring products are correctly sized at the time of instal</li> <li>Implementing best practice ongoing maintenance practic</li> <li>Raising the temperature set point for MEPS-compliant ur can save between 6-10% per degree up to 27°C</li> </ul>	U4E MEPS, depending on stringency,12%-will reduce national electricity use by21%		
<ul> <li>The use of control systems, sensors and thermal zoning. from AC controls varies greatly depending on the situatic savings can be:</li> </ul>	Increasing the 6% temperature set point saves		
<ul> <li>28-35% for small offices</li> <li>32-35% for small retail</li> <li>24% for supermarkets</li> </ul>	In suitable applications, controls can typically save		
	Savings	Compared	
<ul> <li>Occupancy &amp; daylight sensors used in all appropriate settings can typically save up to: <ul> <li>40% in commercial settings</li> <li>30% in industrial settings</li> </ul> </li> <li>Dimming controls at off-peak times can typically save as much as:</li> </ul>	which, by 2040, could save up to: 113.8 GWh/y 42 GWh/y	U4E MEPS, in the minimum and high ambition scenarios, will reduce national electricity use by In suitable	6%- 10% 25%-
<ul><li>as much as:</li><li>25% for street lighting</li></ul>	65.2 GWh/y	applications, controls can typically save	40%
INDUSTRIAL ELECTRIC MOTORS	Savings	Compared	
<ul> <li>The use of Variable Speed drives in all suitable applications could give an average saving of as much as:</li> <li>20% when used with pumps</li> <li>20% when used with fans/blowers</li> </ul>	which, by 2040, could save up to: 39 GWh/y 52.3 GWh/y	U4E MEPS, in the minimum and high ambition scenarios, will reduce national electricity use by	1.2%- 2%
<ul><li>10% when used with compressors</li><li>5% when used in mechanical applications</li></ul>	53.1 GWh/y 3.9 GWh/y	In suitable applications, VSDs can typically save	5%- 20%

#### DISTRIBUTION TRANSFORMERS SMART GRIDS

The main savings opportunities for distribution transformers come from management practices such as:

- Ensuring transformers are correctly sized at the time of installation
- Implementing best practice ongoing maintenance and rewinding methods

Using Smart Grids brings other benefits including:

- Reducing projected increases in peak demand by as much as 24%, allowing:
  - reduced capacity overall
  - delays in maintenance/replacement requirements
  - reduced CO<sub>2</sub> emissions from peaking plant
- Allowing improved integration of distributed and renewable generation, and more electric cars both with associated CO<sub>2</sub> emissions benefits

# COUNTRY DATA, TYPICAL PRODUCT ASSUMPTIONS AND METHODOLOGY



GENERAL INFORMATION		ELECTRICITY MARKET	ELECTRICITY MARKET		
Population	1.4 Million	Residential electricity tarif	f 0.07 US\$/kWh		
GDP per capita	15,719 US\$				
Electrification level	100.0%	Transmission and	2.3%		
CO <sub>2</sub> emission factor 0.64 kg/kWh		distribution loss factor	2.5%		

#### TYPICAL PRODUCT ASSUMPTIONS

2022 Unit Energy Consumption (kWh/year) or Efficiency Level						
Product		Business Minimum As Usual Ambition Scenario		High Ambition Scenario	Type of Product	
Lighting		GSL Linear HID	15W CFL 15 36W T8 108 70W HPS 307	10W LED 10 20W LED 60 50W LED 219	7W LED 7 16W LED 48 40W LED 175	800 lumen bulb: 1,000 hrs/year 4 foot tube: 3,000 hrs/year Poletop street light: 4,380hrs/year
		Residential Refrigerators	457	263	131	2-door refrigerator freezer of average size 270 liters
Cooling		Commercial Refrigeration	5,507	4,877	3,632	A market-weighted average of retail display cabinets (both remote and integral), drinks cabinets, storage cabinets, ice-cream freezers, vending machines and scooping cabinets.
		Room Air Conditioners	3,573	2,504	1,839	A mix of 3.5 kW and 7 kW split units with a weighted-average cooling capacity of 4.6 kW
lent		Industrial Electric Motors (IEC level)	IE1	IE2	IE3	3-phase induction motors used in the industrial sector
Equipment		Distribution Transformers (Model regulation level)	See note	Level 1	Level 2	Three-phase and single-phase liquid-filled and three-phase dry-type power distribution transformers

Distribution transformers Note: it is assumed that distribution transformers have losses in line with those assumed in the CENELEC harmonization research for the development of the EU standards.

#### METHODOLOGY

The analysis uses the UNEP-U4E's Country Savings Assessment Models to estimate the impacts of implementing policies that improve the energy efficiency of each product analysed. The brief methodology is provided below (contact U4E for more information):

• The cooling analyses for refrigerators, commercial refrigeration and air conditioners use a bottom-up stock model approach combined with market data on typical product performance. Future growth is projected based on established relationships between ownership and other known macroeconomic indicators.

• The lighting analysis uses a bottom-up stock model with market data on typical products to estimate current light demand. This is projected forwards in line with IEA estimates of future buildings electricity use. It is then used with an estimate of future average efficacy to calculate electricity consumption. This efficacy is based on assumptions about future trends in lamp switching and product efficacy in different scenarios.

• The equipment models are both top-down estimates. The electricity use of motors is based on its typical relationship to industrial GDP, while distribution transformers are based on the typical capacity required for a total national electricity demand. Electricity use is shared between several typical products and applications based on market data. In both cases, the improvement in average stock efficiency is based on end-of-life stock turnover and new sales.

The savings potential in each scenario assumes Minimum Energy Performance Standards (MEPS) are introduced in 2022 at two different levels of ambition (minimum and high) as shown in the Typical Product Assumptions table above.

Further details of the modelling approach and assumptions are available on the <u>U4E website</u>. For more information contact: unep-u4e@un.org